

INFILTRATION THROUGH ROADSIDE SWALES

BY

EDUARDO AVELLANEDA
B.S.E., University of Central Florida, 1984

THESIS

Submitted in partial fulfillment of the requirements
for the degree of Master of Science in Engineering
in the Graduate Studies Program of the College of Engineering
University of Central Florida
Orlando, Florida

Fall Term
1985

ABSTRACT

In recent years, there have been efforts to develop a design procedure for swale systems which could be applied to permeable soils. This design should consider space limitations or any other site restriction.

Five existing swale sites in the Central Florida area were instrumented to determine flow rates and permeabilities. Twenty-two experiments were performed.

It is concluded that the use of a double-ring infiltrometer to determine the infiltration rate is possible for existing swale sites.

Another conclusion is that published values of permeability are very variable and not accurate, nor specific enough to predict actual infiltration rates. However, very conservative values can be used in design. A swale design procedure, including an equation for the length of triangular and trapezoidal swales, was developed.

ACKNOWLEDGEMENTS

Academically, I would like to start by thanking Dr. Martin P. Wanielista, who made this report possible, and who gave me all his support to make it through graduate school. I would also like to thank the other members of my committee, Dr. Shiou-San Kuo and Dr. Yousef A. Yousef, for helping me to overcome the difficulties of writing a thesis report. A word of gratitude to Dr. Scot Leftwich who encouraged me to step forward at every stage of my career. Finally, I would like to thank the University of Central Florida and the Florida Department of Transportation for giving me their support throughout the development of this thesis.

Personally, I dedicate this report to my parents and my grandmother, who provided me with all the financial and sentimental support throughout my entire life and career; to my brother, Raul, who was not only my assistant in all the experiments in the field, but who has acted as my moral guide throughout my life by giving me all his love and his care; to my sisters, Carol and Gritty, who, along with the rest of my brothers, have always encouraged me to keep looking forward and to give the best of myself; and last, but by no means least, to my fiancée, Soraya, who was my supplier of the love and the energy necessary to keep me going all the time.

God bless them all.

TABLE OF CONTENTS

LIST OF TABLES	vi
LIST OF FIGURES	vii
Chapter	
I. INTRODUCTION	1
Scope and Objectives	1
II. LITERATURE REVIEW	3
Introduction	3
Precipitation	3
Hydrograph Generation	4
Infiltration	4
Green-Ampt Model	5
Mein-Larsen Model	6
Horton's Equation	7
Mass Balance Method	9
Permeability	9
Constant Head Permeameter	11
Falling Head Permeameter	14
Other Methods	15
Coefficient of Uniformity and Curvature	15
Roughness Coefficient	16
Current Research	17
III. FIELD PROCEDURE	18
Site Descriptions	18
Swale at Sunrise Place	25
Swale at Interstate 4 - West	25
Swale at Interstate 4 - East	26
Swale at State Road 426	26
Swale at Reed Road	27
Flow Measurements	27
Water Content	28
Infiltration Rate	28
IV. RESULTS	30
Geohydrologic Data	30
Mass Balance and Double-Ring Infiltration Rates	32
Field Experimentation	33

V.	DESIGN METHODOLOGY	42
	Introduction	42
	Triangular Shape Swale	42
	Trapezoidal Shape Swale	45
VI.	CASE STUDIES	47
	Experiment at Interstate 4 - East	47
	Experiment at Reed Road	49
VII.	CONCLUSIONS AND RECOMMENDATIONS	51
	Introduction	51
	Infiltration	51
	Design Equation	53
	Future Recommendations	54
	Appendices	
	A. SIEVE ANALYSIS FOR SOILS OF SWALES STUDIED	56
	B. HYDROGRAPHS FOR SWALE EXPERIMENTS	62
	C. DERIVATION OF DESIGN EQUATION FOR TRIANGULAR SECTIONS	82
	D. DERIVATION OF EQUATION FOR TRAPEZOIDAL SECTIONS	89
	REFERENCES	95

LIST OF TABLES

1. Coefficient of Permeability of Common Natural Soil Formations	12
2. Determining Permeability	14
3. Geohydrologic Site Data	31
4. Summary of Infiltration Ratios During Study Period	34
5. Flow Data for Swale at Sunrise Place	35
6. Flow Data for Swale at S.R. 426	36
7. Flow Data for Swale at Reed Road	37
8. Flow Data for Swale at Interstate 4 - West	38
9. Flow Data for Swale at Interstate 4 - East	39
10. Constant (K) for Design Equation for Triangular Shape . .	44
11. Sensitivity Analysis for Retardance Coefficient at Interstate 4 - East	45

LIST OF FIGURES

1. Factors Affecting the Infiltration Rate into Unfrozen Soil	10
2. Permeability Test Data	13
3. Map Location of Swales	19
4. Swale at Sunrise Place - Red Bug Lake Road	20
5. Swale at I-4 Maitland Interchange - East	21
6. Swale at I-4 Maitland Interchange - West	22
7. Swale at State Road 426	23
8. Swale at Reed Road - Chuluota Area	24
9. Grain Size Distribution Diagram - Red Bug Lake Road Swale	57
10. Grain Size Distribution Diagram - Reed Road Swales	58
11. Grain Size Distribution Diagram - Maitland Interchange - West Swale	59
12. Grain Size Distribution Diagram - Maitland Interchange - East Swale	60
13. Grain Size Distribution Diagram - S.R. 426 Swale	61
14. Swale at Sunrise Place - Experiment No. 1	63
15. Swale at Sunrise Place - Experiment No. 3	64
16. Swale at Sunrise Place - Experiment No. 4	65
17. Swale at Sunrise Place - Experiment No. 5	66
18. Swale at Sunrise Place - Experiments No. 6 and 7	67
19. Swale at I-4 East - Experiment No. 1	68

20.	Swale at I-4 East - Experiments No. 2 and 3	69
21.	Swale at I-4 West - Experiment No. 1	70
22.	Swale at I-4 West - Experiment No. 2	71
23.	Swale at I-4 West - Experiment No. 3	72
24.	Swale at S.R. 426 - Experiment No. 1	73
25.	Swale at S.R. 426 - Experiment No. 2	74
26.	Swale at S.R. 426 - Experiment No. 3	75
27.	Swale at S.R. 426 - Experiment No. 4	76
28.	Swale at Reed Road - Experiment No. 1	77
29.	Swale at Reed Road - Experiment No. 2	78
30.	Swale at Reed Road - Experiment No. 3	79
31.	Swale at Reed Road - Experiment No. 4	80
32.	Swale at Reed Road - Experiments No. 5 and 6	81

CHAPTER I

INTRODUCTION

In recent years, there has been an extensive effort to analyze and evaluate the different processes by which highway runoff waters and their pollutants can be lessened. Several methods to achieve infiltration of runoff waters from highways have been used. Among the most popular are detention/retention ponds and natural swale systems. Swales are vegetated open channels which both transmit and infiltrate runoff waters.

Several factors affect the effectiveness of swale systems, and proper considerations of such factors are necessary to optimize their design. Swales are an important management practice for control of rainfall excess (runoff volumes). Inherent in the design is the specification that the swale-wetted areas will infiltrate the rainfall excess (Wanielista et al. 1985).

Scope and Objectives

This study is limited to the determination of the infiltration capacity of swales. The quality of runoff is not emphasized, while quantity is. However, proper hydraulic design of swales would also increase their effectiveness to remove pollutants.

The swales used in this study are actual highway swales, adjacent to operating highways.

The objectives of this study are to determine:

1. double-ring infiltrometer, laboratory and published permeability measures that may relate to field infiltration rates and volumes.
2. design equations to size the length of a swale knowing runoff hydrograph volumes, field infiltration rate estimates, slope, cross-sectional area and roughness coefficients.

CHAPTER II
LITERATURE REVIEW

Introduction

A swale, as defined by the Florida State Department of Environmental Regulation (1981), is a shallow trench used to convey stormwater and permit infiltration/percolation. Although several other definitions of swales exist, the most commonly used define swales as broad shallow grassed channels, or grassed roadside ditches (Kent et al. 1983).

Precipitation

The State of Florida Administrative Code, Chapter 17.25, on Stormwater Management (1985), requires that swales be designed to infiltrate the rainfall excess from the one-in-three years design storm. Therefore, rainfall data must be available for design. Several methods have been used to compute the average precipitation, such as Thiessen and arithmetic average methods; however, interpretation of the watershed area and the designer's own experience must be predominant to predict precipitation intensities and volumes.

For Florida, 90% of all storms have a volume of one inch or less. Distribution of storm frequencies show that roughly 120 storms can be expected to occur in any location in Florida during one year. The

rainfall mass distribution curves presented by Wanielista (1978) can be used. Specifically, for Orlando, a time of event distribution was developed. It shows that most storms (regardless of volume or intensity) can be expected to last less than 8 hours. Other distributions may be calculated for other areas from hourly precipitation data (Anderson 1982).

Hydrograph Generation

Similarly, hydrograph generation is necessary to determine the rainfall excess (runoff) to reach the receiving streams. Models, such as Santa Barbara unit hydrograph, unit hydrograph, Soil Conservation Service dimensionless hydrograph, and the rational formula are most widely used in calculating hydrograph shapes (Wanielista 1978). Several other methods are available, such as the recession analysis method, and once again, the judgement of the designer must determine their use.

Infiltration

Very special consideration must be given to the determination of the infiltration capacity of a swale. Infiltration is the passage of water through the soil surface into the soil. Although a distinction is made between infiltration and percolation (the movement of water within the soil) the two phenomena are closely related since infiltration cannot continue unimpeded unless percolation removes infiltrated water from the surface soil. The soil is permeated

by non-capillary channels through which water flows, primarily downward, toward the groundwater, following the path of least resistance. Capillary forces continuously divert gravity effected water into capillary-pore spaces, so that the quantity of gravity water passing successively lower horizons is steadily diminished. This leads to increasing resistance to gravity flow in the surface layer and a decreasing rate of infiltration as a storm progresses. The rate of infiltration in the early phases of a storm is less if the capillary pores are filled with water from a previous storm.

The infiltration volume is a function of the infiltration rate and contact time between the water and the soil, and this contact time is a function of the slope, resistance, length of swale, flow rate and depth of flow.

The infiltration process is non-linear. Several models have been adopted to create a unique mathematical model that can describe it. Darcy's Law and the principle of continuity of flow through porous media dictate the form of equations which best describe the rate of infiltration for a particular soil (Anderson 1982). A description of the existing models follows.

Green-Ampt Model

One of the earliest infiltration equations was developed by Green and Ampt (1911), which in light of subsequent research (Bouwer 1966, Fox 1975, Mein and Farrell 1974, Mein and Larson 1973, Morel-Seytoux and Khanji 1974, Neuman 1976) can be written as:

$$V_i = K \frac{H_w + L_f - h_{cr}}{L_f}$$

where:

- V_i = infiltration rate (length/time)
- K = hydraulic conductivity of wetted zone
- H_w = depth of water
- h_{cr} = critical pressure head of soil for wetting
- L_f = depth to wetting front of groundwater

This equation is obtained by applying Darcy's equation to the wetted zone, assuming vertical flow and uniform water content and hydraulic conductivity in the wetted zone. The wetting front is considered as an abrupt interface between wetted and non-wetted material. Thus, the infiltration system is treated as "piston flow" (Bouwer 1978).

Mein-Larsen Model

The Mein-Larsen Model (1973) postulates a two-step process to include surface delay effects during infiltration. In this model, infiltration rate is related to hydraulic conductivity, initial moisture content, wetting front positions, rainfall intensity and capillary action at the wetting front. Uniform initial moisture content in the zone of infiltration, constant rainfall intensities and homogeneous soil types are assumptions upon which the model is based. The Mein-Larsen Model has merit and predicts infiltration

within its assumptions, but the quantity of parameters which must be measured to define the process may be unattractive to some potential users of the model.

In reality, infiltration-flow systems are much more complex than can be expressed with a simple equation. Interaction between the infiltrating water and the soil, rearrangement of soil particles near the surface due to the impact of raindrops or erosion by runoff or other flowing water, accumulation of fines on the surface, and the inherent non-uniformity of the soil limit the accuracy with which equations based on Darcy's Law or diffusion theory can predict infiltration rates. The other approach, then, is to use empirical equations with "constants" calculated from measured relations between V_i and t or between I_t and t .

The simplest empirical equation is the one by Kostiaikov (1932), where I_t is expressed as:

$$I_t = Ct^\alpha$$

The parameters C and α are readily obtained from a plot of the measured values of I_t and t on double logarithmic paper, which should yield a straight line.

Horton's Equation

R.E. Horton (1940) proposed representing the infiltration rate by an exponentially decaying formula of the form:

$$f = f_c + (f_0 - f_c) e^{-K_f t}$$

where:

- f = infiltration rate at time t
- f_0 = initial infiltration rate at time $t = 0$
- f_c = limiting infiltration rate
- K_f = a constant
- t = time

Horton's method of describing infiltration makes it one of the easier methods to gather rate data for, but there are shortcomings to the use of this equation. Horton's equation is descriptive of ponded conditions and has no direct discernable dependence on rainfall intensity. The equation must be calibrated for different soil types and cover conditions (Musgrave et al. 1964). The relationship of f_0 to initial moisture content could use verification. The question of whether the f_c value is the true predictor of saturated hydraulic conductivity needs investigation. The variation of the K factor with soil type, moisture and cover conditions is also subject for future determination (Anderson 1983). Horton's equation is the principle in which the infiltration rate obtained from a double-ring infiltrometer is based.

Mass Balance Method

Probably the most accurate method of determining infiltration is by the mass balance method; however, it has the disadvantage that it is a labor intensive method that requires the movement of a lot of equipment. Two flow-measuring devices, such as weirs, are placed at a certain distance in the swale, and water is pumped into the swale system measuring the flow in, and the flow out, until they both stabilize when the pumping of water is stopped. Then, the remaining water storage is measured and the infiltration volume is calculated by the equation:

$$I = Q_{in} - Q_{out} - \text{Storage}$$

The average infiltration rate can then be calculated by measuring the time and dividing the infiltration volume by the product of the time, the wetted perimeter and the distance between weirs.

Some other methods to determine infiltration can be used, among which is included the curve number method. Figure 1 lists the factors that affect the infiltration rate into a soil. These factors include the hydraulic conductivity, the moisture content, the soil classification, and the surface conditions.

Permeability

Permeability can be defined as the movement capability of water through the soil; it has the units of length over time, and typical

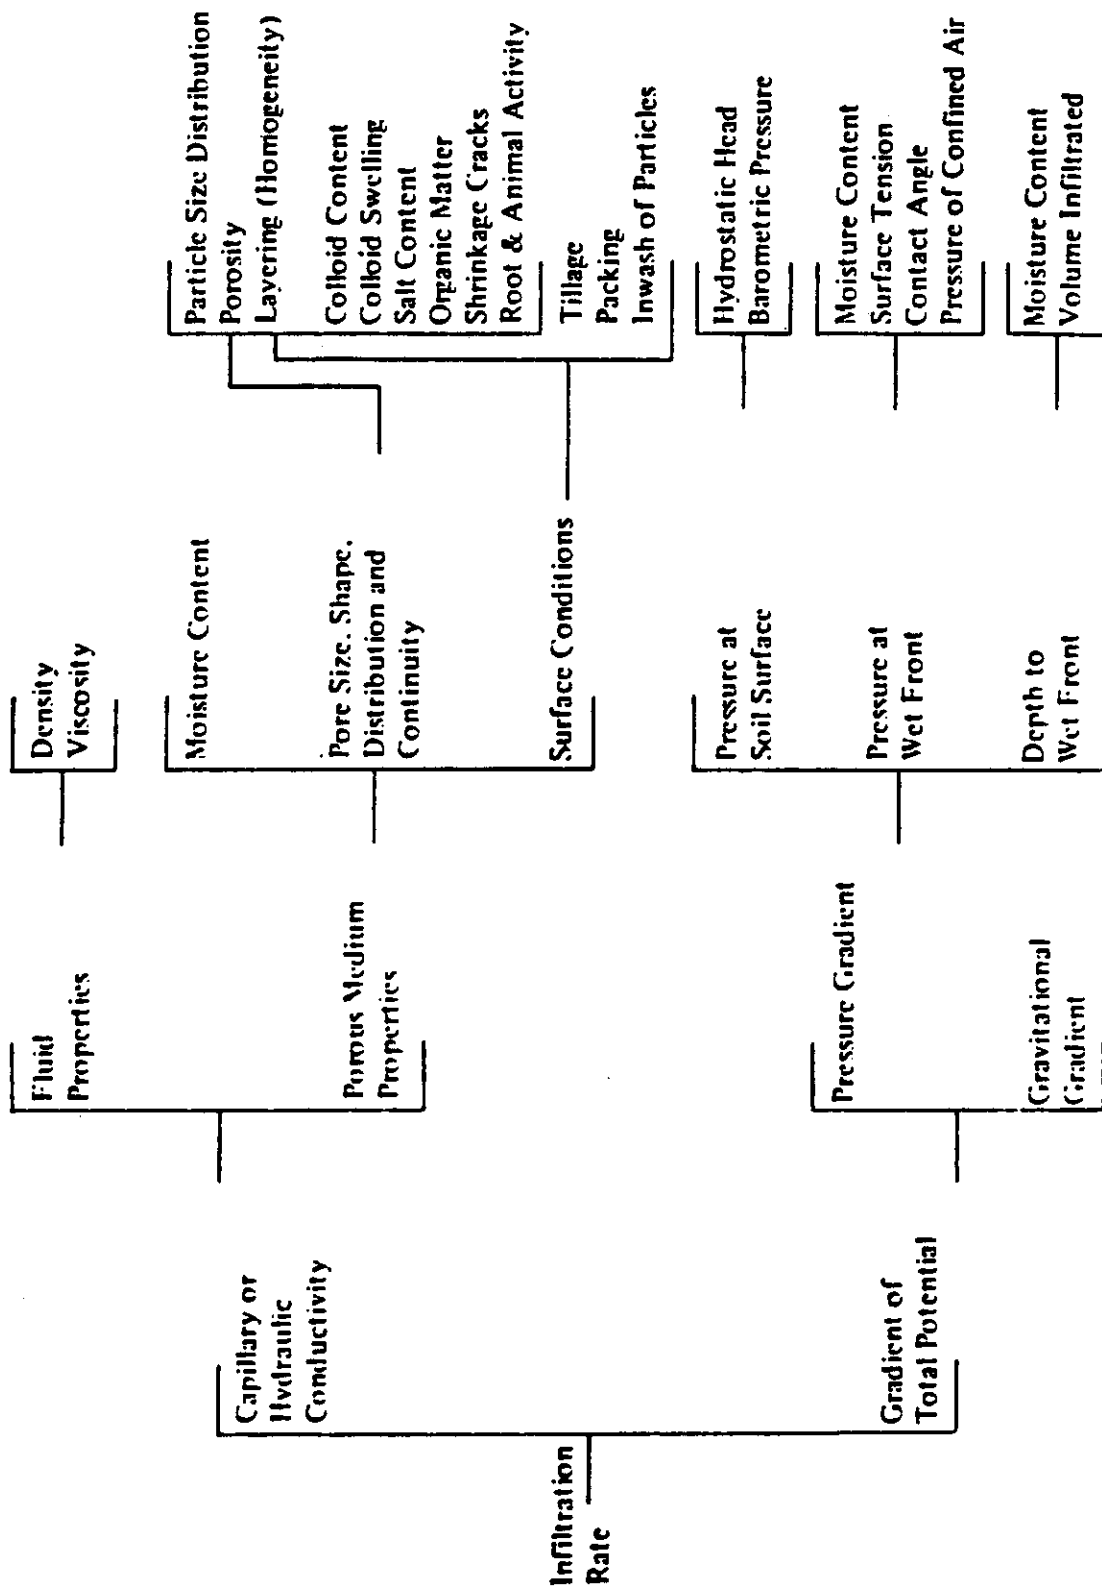


Figure 1. Factors Affecting the Infiltration Rate into Unfrozen Soil.

values of it can be found in Table 1 and in Figure 2 in units of cm/sec. These approximate average values for permeability listed in Table 1 are to be used only when no other information of the soil can be obtained. Those values do not present high levels of accuracy and big errors can be made if they are used.

There are several methods to define permeability. Some of them are performed in the field, while others are done in the laboratory. Table 2 lists some of these methods. The most common direct methods for determining permeability in the laboratory are the constant and falling head permeameters.

Constant Head Permeameter

The constant head method consists of measuring the time, t , for the volume of water, Q , to pass through a soil sample of length, L , and cross-sectional area, A , while keeping a constant head, Δh . The permeability, K , is then computed as:

$$k = \frac{QL}{\Delta h At}$$

where:

L = length of sample

Q = flow rate of water through sample

Δh = head of water which is kept constant

A = cross-sectional area of sample

t = time

TABLE 1
 COEFFICIENT OF PERMEABILITY OF COMMON NATURAL SOIL FORMATIONS

FORMATION	VALUE OF K	
	(cm/sec)	(in/hr)
River deposits		
Rhone at Genissiat	Up to 0.40	< 567
Small streams, eastern Alps	0.02-0.16	28-227
Missouri	0.02-0.20	28-283
Mississippi	0.02-0.12	28-170
Glacial deposits		
Outwash plains	0.05-2.00	71-2835
Esker, Wesfield, Massachusetts	0.01-0.13	14-184
Delta, Chicopee, Massachusetts	0.0001-0.015	0.14-21
Till	< 0.0001	< 0.14
Wind deposits		
Dune sand	0.1-0.3	142-425
Loess	+ 0.001	+ 1.4
Loess loam	+ 0.0001	+ 0.14
Lacustrine and marine offshore deposits		
Very fine uniform sand, U* = 5-2	0.0001-0.0064	0.14-9
Bull's liver, Sixth Avenue, New York, U = 5-2	0.0001-0.0050	0.14-7
Bull's liver, Brooklyn, U = 5	0.00001-0.0001	0.014-0.14
Clay	< 0.0000001	< 0.00014

* U = uniformity coefficient

SOURCE: Williams 1979

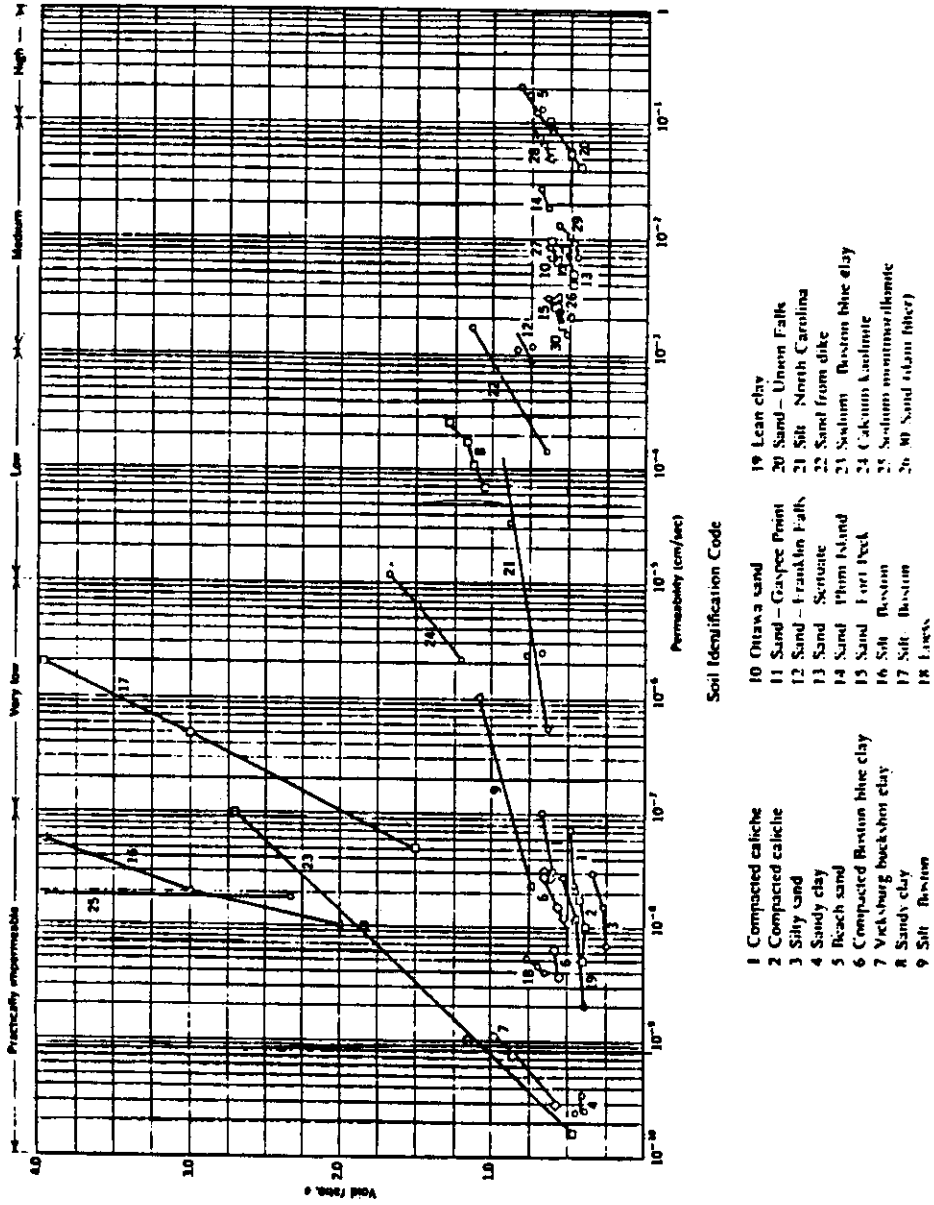


Figure 2. Permeability Test Data.

TABLE 2
DETERMINING PERMEABILITY

-
- A. Direct Methods - Laboratory
 - 1. Fixed or constant head permeameter
 - 2. Falling head permeameter
 - B. Direct Methods - Field
 - 1. Auger hole
 - 2. Tube method
 - 3. Piezometer method
 - 4. Tracers
 - 5. Mass balance
 - C. Indirect Methods
 - 1. Consolidation testing
 - 2. Horizontal capillary
 - 3. Formulas
 - 4. Design charts
-

SOURCE: Spangler and Handy 1973

Falling Head Permeameter

For the falling head permeameter, the volume rate of flow, q , can be expressed on the basis of the rate of fall, dH/dt , of the water level in the narrow standpipe as $q = A dH/dt$, or on the basis of the flow through the sample with Darcy's equation as $q = KA H/L$. Equating both expressions for q , integrating and solving:

$$K = \frac{a L}{A \Delta t} \ln \frac{h_1}{h_2}$$

where:

L = length of soil sample

Δt = time interval

a = area of the tube

A = cross-sectional area of sample

h_1, h_2 = H values at beginning and end of time, t

Other Methods

Several direct methods to determine permeability in the field are listed in Table 2. They include the auger hole method, the tube method, the piezometer method, etc. Furthermore, indirect methods to determine permeability are available, and the criteria to choose the method must depend on what type of facilities are available. These methods to obtain permeability can be found in Spangler and Handy (1973).

Several other factors must be considered to analyze a swale system, such as type of vegetation covering the swale, soil classification, antecedent moisture content, slope, maintenance, etc. However, only the coefficients of uniformity and curvature, and the roughness or retardance coefficient, are described in this report.

Coefficient of Uniformity and Curvature

A soil that has a nearly vertical grain-size distribution curve (all particles of nearly same size) is called a uniform soil. If the curve extends over a rather large range, the soil is called well-graded. The distinction between a uniform soil and a well-graded

soil can be defined numerically by the uniformity coefficient, C_u , and the coefficient of curvature, C_z . C_u is defined by the ratio D_{60}/D_{10} and a value smaller than 4 indicates that the soil is uniform. The more uniform the soil, the greater its infiltration capacity becomes. Therefore, a value for C_u less than 4 would indicate that the soil has a high infiltration rate. C_z is defined as $D_{30}/D_{10}D_{60}$ and a value of C_z between 1 and 3 would indicate that a soil is well-graded (Dunn et al. 1980). A well-graded soil would have small infiltration capacity while a poorly graded soil would have a high infiltration rate.

Roughness Coefficient

Proper consideration must be given to selecting an accurate value for Manning's Roughness Coefficient. When Manning's equation is used, and the assumptions that the width of flow is much greater than the depth of flow and that the rainfall excess is equivalent to depth of flow per unit time, then the Manning coefficient can be estimated using the equation developed by Wanielista et al. (1983) and is reproduced as:

$$n = \frac{t_e^{5/3} S^{1/2} (R/t)^{2/3}}{L}$$

where:

R/t = rainfall excess rate (m/hr)

t_e = time to equilibrium (min)

L = length of swale (m)

S = flow slope

For Central Florida, an average roughness coefficient of $n = 0.05$ is suggested for use in swale systems. Several tables and graphs are available to predict the value of n . A sample of them is listed in Todd (1980).

Current Research

Past research has been done to predict field infiltration rates. This study was limited to one site and no determinant correlation was developed between actual infiltration rates and either double-ring infiltration rates or laboratory data. It is concluded that the coefficient of discharge varies with the infiltration capacity of the swale (Wanielista et al. 1985).

CHAPTER III
FIELD PROCEDURE

Site Descriptions

Swales at five different sites are chosen for the experiments. The choices are based on: (1) number of lanes of traffic from which the swale receives runoff waters, (2) variable permeability, and (3) availability of water. Two of them receive waters from an interstate highway (swales at Interstate 4), two receive waters from two-lane secondary highways (swale at Sunrise Place and swale at Reed Road), and one receives runoff from a state road (swale at SR 426). The following is a brief description of each site.

The soil classification is obtained in the laboratory passing the samples through different sieves and using the U.S. Geological Survey (U.S.G.S.) classification system. The coefficient of permeability is obtained in the laboratory using the constant head permeameter described previously in the Literature Review section.

Figures 3 through 8 show the map location of the sites, the cross-sections, side slopes and soil classification for each one of the swales. It can be seen that the soil type is about the same in each of the locations, while the flow slope, the coefficient of permeability and the side slope varies from site to site.




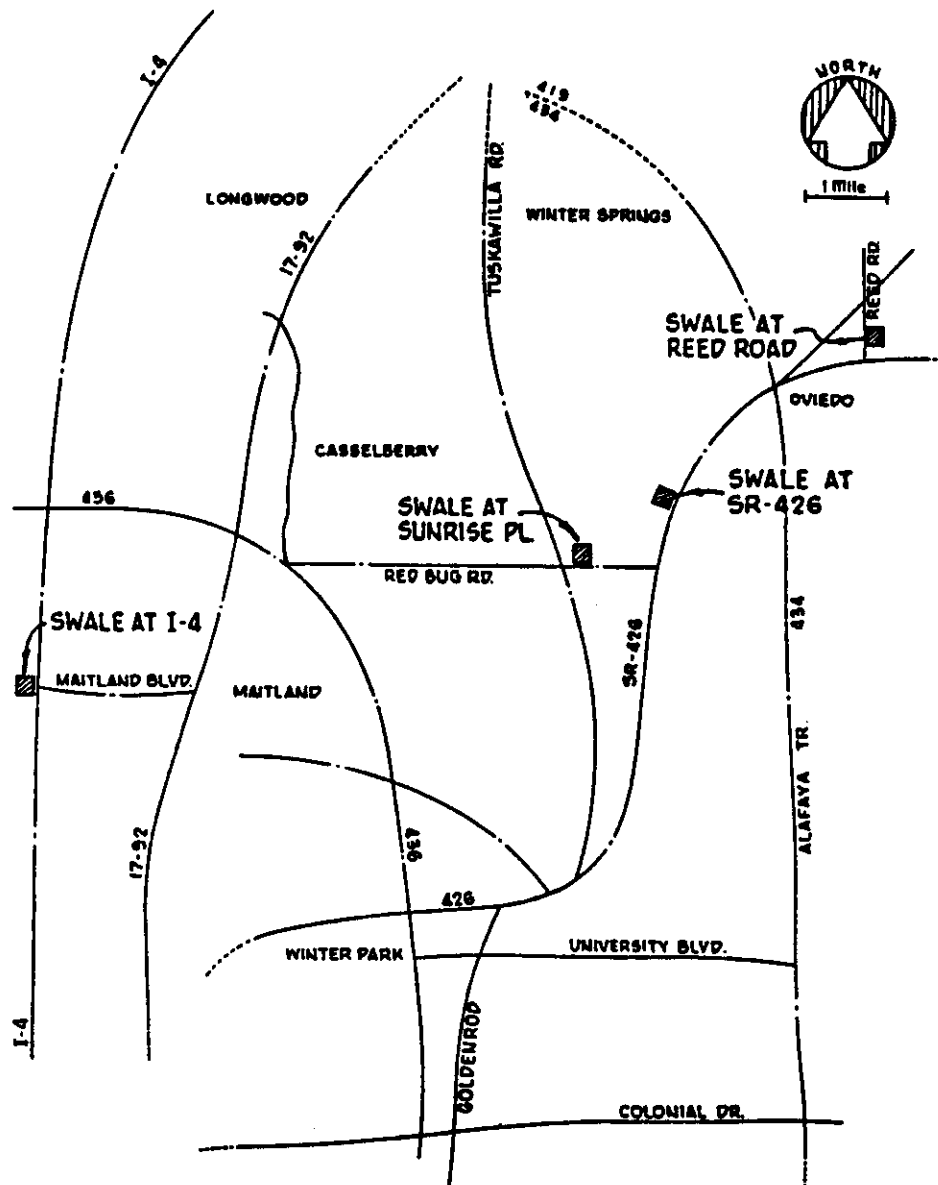


Figure 3. Map Location of Swales.

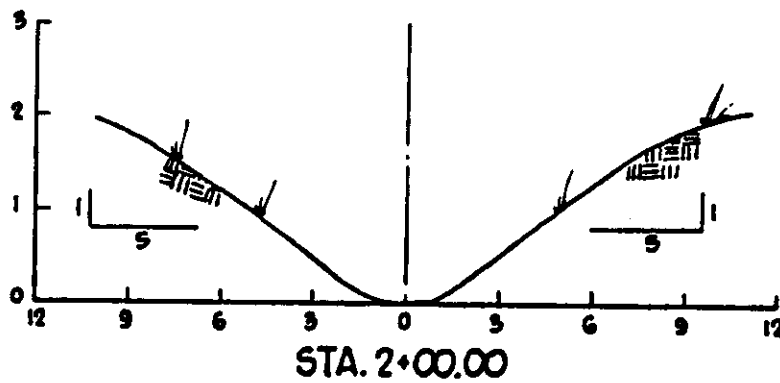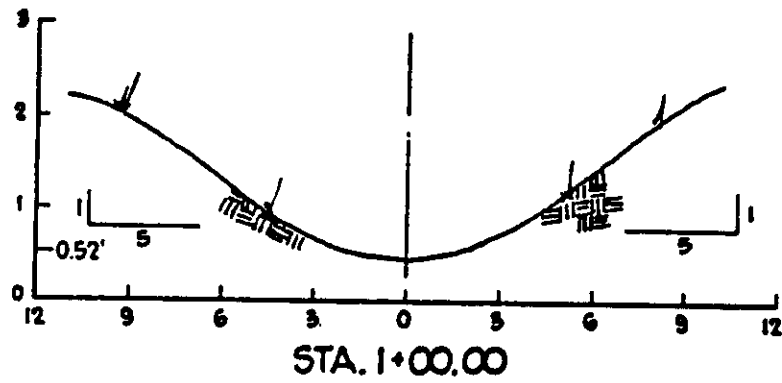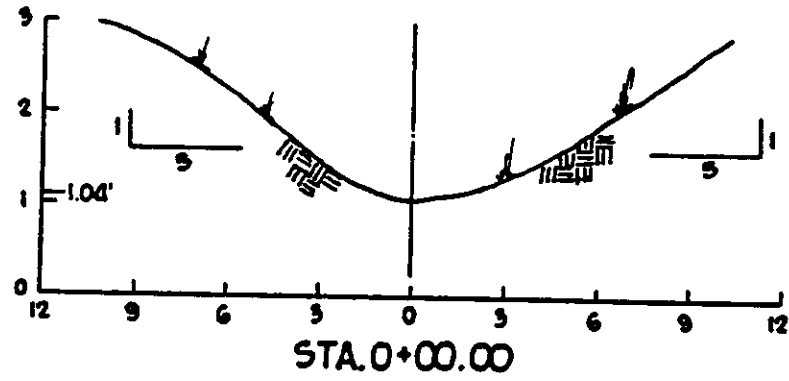

Site Classification

$C_u = 1.38$

$C_u = 0.96$


$K_d^z = 10.871 \text{ in/hr}$

Longitudinal slope: 0.0052

Horizontal Scale: 6' =

Vertical Scale: 2' =

Figure 4. Swale at Sunrise Place - Red Bug Lake Road.

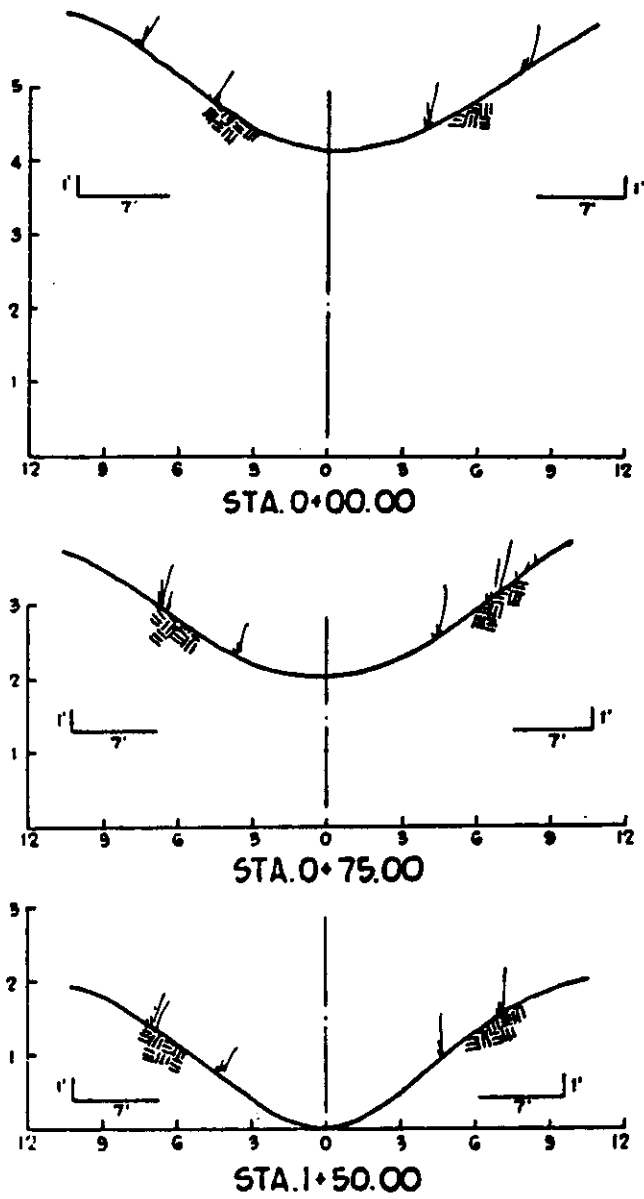


Site Classification

$C_u = 2.08$

$C_u = 1.33$





$K_d^Z = 4.068 \text{ in/hr}$

Longitudinal Slope: 0.0279

Horizontal Scale: 6' = 

Vertical Scale: 2' = 

Figure 5. Swale at I-4 Maitland Interchange-East.

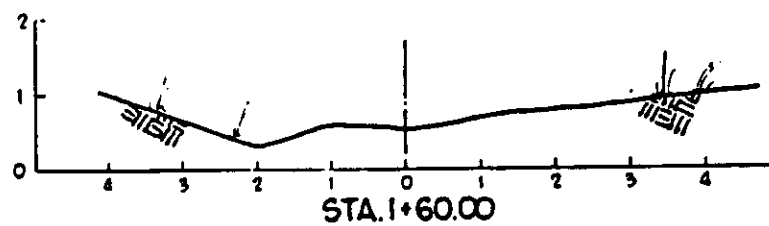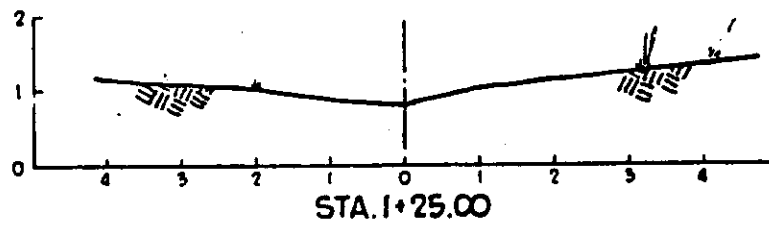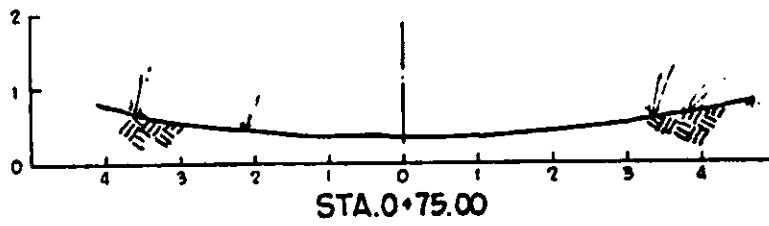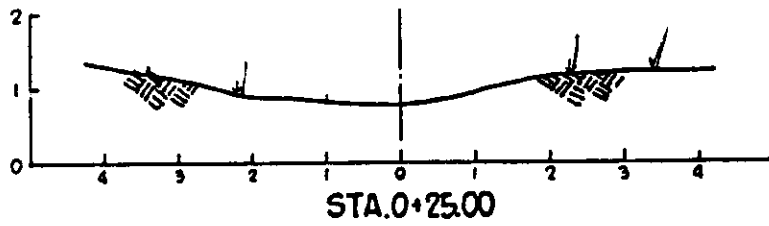


Site Classification

$C_u = 1.966$

$C_z = 1.412$




$K_d = 7.228$

Longitudinal Slope: 0.0085

Horizontal Scale: 6' = 

Vertical Scale: 2' = 

Figure 6. Swale at I-4 Maitland Interchange-West.

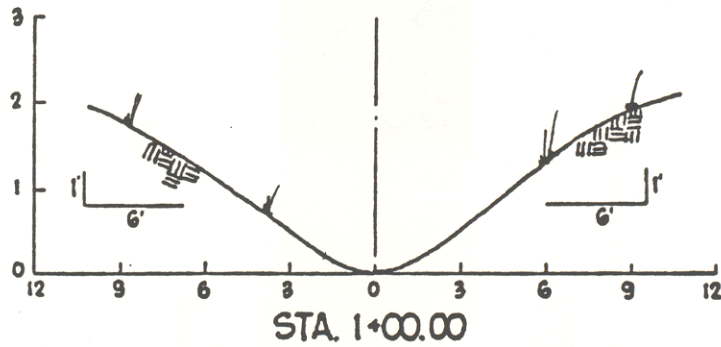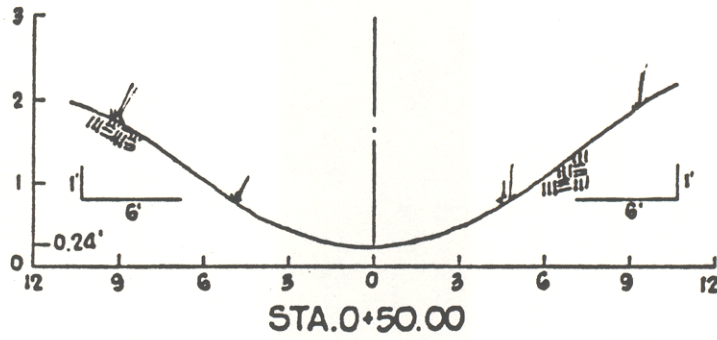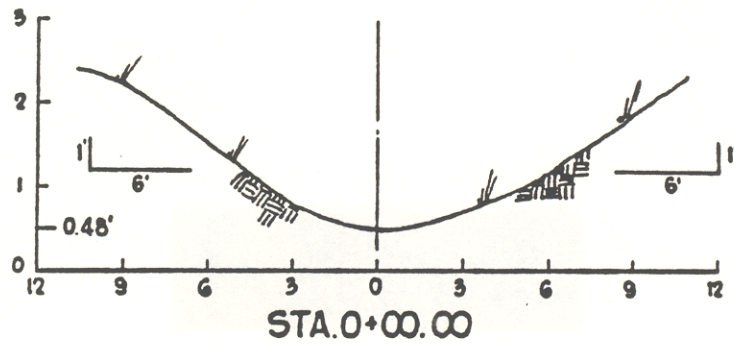

Site Classification

$C_v = 1.67$

$C_u = 1.24$


$K_d = 12.047$ in/hr

Longitudinal Slope: 0.0048

Horizontal Scale: 6' = 

Vertical Scale: 2' = 

Figure 7. Swale at State Road 426.

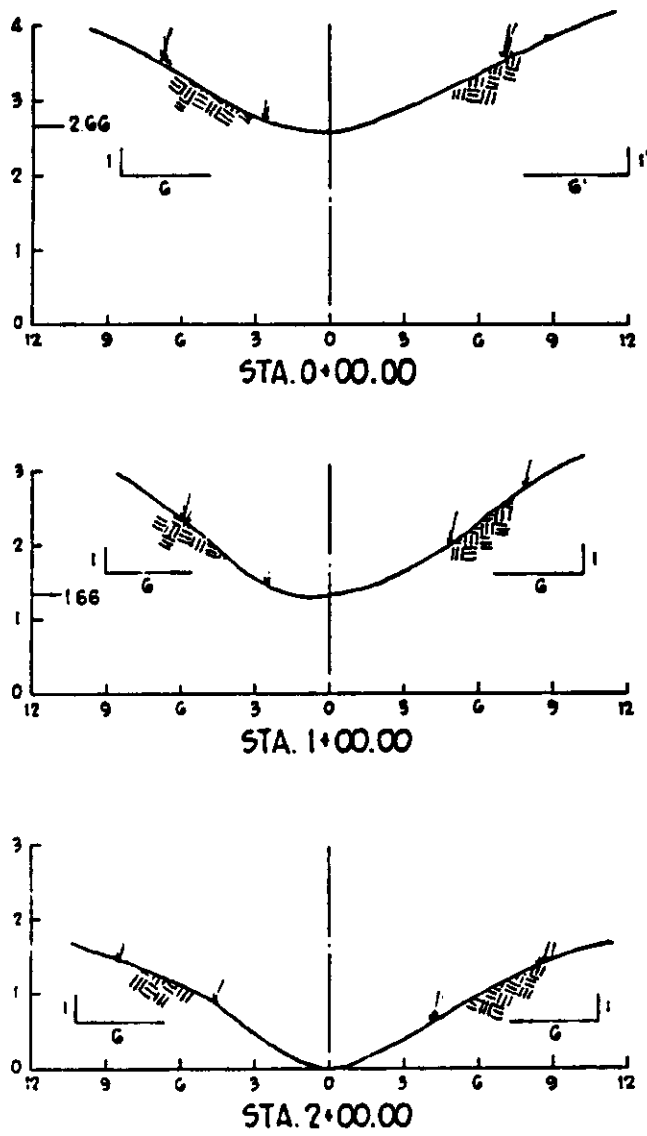

Site Classification

$C_u = 1.81$
 $C_z = 1.28$
 $K_d = 3.118 \text{ in/hr}$
 Longitudinal Slope: 0.0133



Horizontal Scale: 6' = 
 Vertical Scale: 2' = 

Figure 8. Swale at Reed Road-Chuluota Area.

Swale at Sunrise Place

This swale is located off of Red Bug Lake Road, at the entrance of Sunrise Place, at approximately two miles west of SR 426 in Seminole County, Florida. The swale is in the north side of the road and the water flows from east to west. The swale is totally grassed and has a high level of maintenance. It receives runoff waters from Red Bug Lake Road and from Sunrise Road through an invert located at the eastern section of the swale. The grass cover is approximately three inches. Its slope (longitudinal) is 0.0052, being the second smallest slope of the swales studied. The soil beneath the grass is a uniform soil with gravelly to fine sand, with a coefficient of permeability of 10.871 in/hr. The side slope of the swale is approximately 5 horizontal by 1 vertical. The value of 1.38 for the coefficient of uniformity, C_u , shows that the soil under the swale is uniform. The value of 0.96 for the coefficient of curvature, C_z , shows that the soil is poorly graded.

Swale at Interstate 4 - West

Located at Maitland Interchange, in the southwest section of the intersection of I-4 and Maitland Boulevard, in Orange County, Florida, with the water flow from north to south, the swale areas are covered with predominantly Bahia grass, approximately two to four inches in height. It receives runoff waters from Interstate 4 and from Maitland Boulevard. The swale has longitudinal slope of 0.0085, and it is usually well maintained. The soil beneath the grass is a

poorly graded soil, with medium to fine sands, and a coefficient of permeability of 7.228 in/hr. C_u is equal to 2.08 and shows that the soil under this swale is uniform. C_z is equal to 1.33 and shows that this soil is better graded than the one in Sunrise Place.

Swale at Interstate 4 - East

Located at Maitland Interchange, in the southeast section of the intersection of I-4 and Maitland Boulevard, in Orange County, Florida, with the water flowing from south to north, this swale presents the same characteristics of the swale located west of I-4, with side slopes of 7:1 and permeability of 4.068 in/hr. This swale has the steepest longitudinal slope of 0.0279. A value for C_u of 2.08 shows that this soil is uniform, and C_z is equal to 1.33 and shows that the soil is better graded than the swale at Sunrise Place.

Swale at State Road 426

This swale is located on State Road 426 in the Slavia Area, in the west side of the road, approximately one mile north of Red Bug Lake Road, in Seminole County, Florida. This swale has water flowing from north to south and has a minimum Bahia grass cover which exposes the swale to some erosion. The maintenance is also very poor, and a large amount of metal cans, bottles and all sorts of trash is usually found on top of the swale. The soil beneath the grass is a uniform soil, with a gravelly to fine sand texture. The coefficient of permeability is 12.047 in/hr, which shows the greatest infiltration

capability of this swale. It presents a longitudinal slope of 0.0048, with side slopes of 6:1. The values of C_u are equal to 1.67 and C_z is equal to 1.24, which show that the soil is uniform and poorly graded.

Swale at Reed Road

This swale is located at the west side of Reed Road in the Chuluota area, half a mile north of SR 419 in Seminole County, Florida, with water flowing southward. The grass cover is approximately two inches and has poor maintenance. The soil beneath the grass is poorly graded, with gravelly to fine sands, and a coefficient of permeability of 3.118 in/hr. It has a steep longitudinal slope of 0.0133, with side slopes of 6:1. The values of C_u is equal to 1.81 and C_z is equal to 1.28, which show that the soil is uniform.

Flow Measurements

The flow through the swale is measured using 90° V-notch weirs and the equation:

$$Q = 2.49 H^{2.48}$$

where:

H = head of flow over the weir (ft)

Q = flow rate (cfs)

These flow rates were converted to gallons per minute using the conversion factor of 448.8 gpm/cfs. Considerations were made to check the accuracy of the weir equation by accumulating flows in a graduated cylinder for a short time period and recording the head over the weir during this period.

These calculations also were checked using the nomograph presented in Public Works Magazine (Wanielista 1981).

Water Content

The water content is determined using a nuclear gauge density moisture tester, before and after water flows through the swale. Water content can also be determined by collecting samples, before and after the flow of water, in recipients that do not allow water to evaporate; then, weighing the samples in the laboratory and drying them in an oven to get the weight of solids in each sample, the water content (as a percentage) can be obtained using the equation:

$$W = \frac{W_T - W_S}{W_S} \times 100$$

where:

W_T and W_S = total weight and weight of solids, respectively

Infiltration Rate

A field infiltration rate is obtained by using a double-ring infiltrometer which consists of one outer ring that is dug into the

ground and an inner, smaller ring (scaled in inches) that is also dug into the ground. The infiltration rate, in inches per hour, is then computed with the change of depth of water in the inner ring in each time interval. The outer ring marks the water flow vertically downward, preventing it from flowing horizontally away from the rings.

Due to the fact that flow in the swale produces dynamic conditions, instead of static, it is hard to predict the actual values from the double-ring method. The pressure distribution caused by flow is less at the bottom of flow in the open channel relative to equal head experiments using the double-ring infiltrometer.

CHAPTER IV

RESULTS

Geohydrologic Data

One of the accomplishments of this experiment is to compare the actual field geohydrologic conditions, such as soil density, average static infiltration rates and average actual infiltration rates, with published values of the Soil Conservation Service (SCS), and with predicted values from laboratory data.

Of specific interest for swale design is the rate of infiltration. In Table 3 are listed some of the geohydrologic site data for the swales studied. It can be seen that the SCS values for permeability represents a wide range of values which makes it difficult for the designer to predict a value that accurately describes the infiltration behavior of the swale. In three cases, the value of the laboratory dry permeability does not coincide with the range presented by the SCS for that site. One of those sites, Reed Road, is described by the SCS classification system as man-made or modified by man, which would explain the offset in the permeability values. The other two cases, Interstate 4 - West and Sunrise Place, represent offset of approximately 20% with the actual value. In Table 3 are listed the longitudinal slopes and the soil densities for each one of the sites. Generally, the lab derived permeability values are lower than or equal to the lower value in the range for the SCS.

TABLE 3
GEOHYDROLOGIC SITE DATA

LOCATION OF SWALE	SCS SOIL TYPE*	SCS PERMEABILITY (in/hr)	LAB PERMEABILITY (in/hr)	SLOPE	SOIL DENSITY (lb/ft ³)	DOUBLE-RING INFILTRATION RATE (in/hr)	AVERAGE MASS BALANCE INFILTRATION RATE (in/hr)
Sunrise Place	LfA	10-20	10.871	0.0052	108	12.86	9.48
Reed Road	LfA-MA	10-20	7.70	0.0133	112	13.46	8.50
S.R. 426	LfA	10-20	15.379	0.0048	90	19.75	14.39
Interstate 4 (West)	BA-IA	5-10	7.228	0.0075	110	7.41	4.08
Interstate 4 (East)	BA-IA	5-10	4.068	0.0279	104	9.95	6.33

* LfA = Leon fine sand, 0 to 2 percent slopes
 MA = Made land, modified by man
 BA = Blanton fine sand, high, 0 to 5 percent slope
 IA = Iberia clay loam

SOURCE: SCS Supplement 1975

Infiltration rates determined from the mass balance include the higher infiltration rates at the beginning of flow. Thus, these values may be higher than at saturated conditions, near the end of flow.

The longitudinal slope is a very important parameter to be considered, because the steeper the slope, the less predictable the infiltration rate from permeability data. The soil density is necessary to perform the permeability test, both in the laboratory and in the field. Finally, in Table 3 are listed the average static infiltration rates and the actual average infiltration rates.

Mass Balance and Double-Ring Infiltration Rates

The double-ring infiltration rate refers to the value of the infiltration rate obtained by using the double-ring infiltrometer. It represents the infiltration rate during non-flow (static) conditions. It is termed static because the flow of water does not present any horizontal displacement; the water should move vertically downward and the value of the infiltration is obtained by measuring the amount of water that infiltrates in each time interval. Several factors affect the infiltration behavior of the soil when the double-ring infiltrometer is used. For instance, the head of water over the soil is much greater by using this method than if the mass balance method is used, which increases the value of the infiltration rate. It can be seen in Table 3 that values of average static infiltration rate range from 7.41 in/hr to 19.75 in/hr. Also listed

in Table 3 are the average values of the infiltration rates obtained from a mass balance. It is also referred to as the dynamic infiltration rate because it determines the infiltration rate of the soil as water flow through the system. The mass balance method is one of the most accurate methods to determine infiltration. However, it involves a significant movement of equipment and a significant amount of time. It can be seen from Table 3 that average values for mass balance infiltration rates range from 4.08 in/hr to 14.39 in/hr for the sites studied. In Table 4 are listed the ratios of the average mass balance infiltration rate to lab permeability, and to average double-ring infiltration rate for each site. It can be seen that, based on the information of Table 4, the lab permeability does not predict accurately the mass balance infiltration rates. Lab permeability values range from about one-half of the mass balance infiltration rate to almost 94% of the actual value. However, the ratio of mass balance infiltration rate to static infiltration rate seems to be always less than 75%, which confirms the belief that the double-ring infiltrometer yields results that are higher than mass balance values. The ratio varies from 52% to 73% with an average value of 62%. A conservative design might use a value for infiltration of 50% of the value obtained with the double-ring method.

Field Experimentation

Values for mass balance infiltration rate for all experiment sites are listed in tables 5 through 9. In each table are given

TABLE 4

SUMMARY OF INFILTRATION RATIOS DURING STUDY PERIOD

LOCATION	# OF EXP	PERMEABILITY (in/hr)	AVERAGE DOUBLE-RING INFILTRATION (in/hr)	AVERAGE MASS BALANCE INFILTRATION (in/hr)	RATIO MASS BALANCE INF PERMEABILITY	RATIO MASS BALANCE INFIL DOUBLE-RING INFIL
Sunrise Place	6	10.871	12.86	9.48	0.87	0.73
Reed Road	6	9.07	13.46	8.5	0.94	0.63
S.R. 426	4	15.379	19.75	14.39	0.94	0.73
Interstate 4 (West)	3	7.228	7.41	4.08	0.56	0.55
(East)	3	4.068	12.17	6.33	0.78	0.52

TABLE 5

FLOW DATA FOR SWALE AT SUNRISE PLACE

EXP. NO.	DISTANCE BETWEEN WEIRS (ft)	FLOW IN (in)	FLOW OUT (in)	BEGINNING WATER CONTENT (%)	ENDING WATER CONTENT (%)	PEAK FLOW IN (in/hr)	PEAK FLOW OUT (in/hr)	SWALE DISCHARGE COEFFICIENT C_v (volume)	SWALE PEAK FLOW COEFFICIENT C_p	MASS BALANCE INFILTRATION RATE (in/hr)
1	100	23.53	9.62	*	*	8.4	4.92	0.41	0.59	13.90
2	60	34.16	22.89	25.75	52.43	41.4	29.76	0.67	0.72	14.10
3	62	35.58	22.64	23.76	51.94	40.32	27.48	0.64	0.68	8.00
4	180	35.76	24.74	35.50	56.30	18.48	13.92	0.69	0.75	5.60
5	60	62.4	49.	33.60	54.8	41.23	37.97	0.79	0.92	6.37
6	180	62.4	40.1	33.60	54.8	41.23	30.62	0.64	0.74	8.92

* Not measured

NOTES: m/hr = in/hr x 0.0254

m = in x 0.0254

m = ft x 0.305

TABLE 6

FLOW DATA FOR SWALE AT S.R. 426

EXP. NO.	DISTANCE BETWEEN WEIRS (ft)	FLOW IN (in)	FLOW OUT (in)	BEGINNING WATER CONTENT (%)	ENDING WATER CONTENT (%)	PEAK FLOW IN (in/hr)	PEAK FLOW OUT (in/hr)	SWALE DISCHARGE COEFFICIENT C_v (volume)	SWALE PEAK FLOW COEFFICIENT C_p	MASS BALANCE INFILTRATION RATE (in/hr)
1	75	68.45	0.23	9.84	41.28	12.84	0.48	0.01	0.03	12.48
2	75	194.05	5.13	10	29.25	12.84	8.16	0.03	0.16	26.80
3	50	60.96	3.59	14.25	34.85	20.52	2.28	0.06	0.11	16.39
4	50	35.3	4.3	20.25	45.90	15.47	2.63	0.12	0.17	10.9

TABLE 7

FLOW DATA FOR SWALE AT REED ROAD

EXP. NO.	DISTANCE BETWEEN WEIRS (ft)	FLOW IN (in)	FLOW OUT (in)	BEGINNING WATER CONTENT (%)	ENDING WATER CONTENT (%)	PEAK FLOW IN (in/hr)	PEAK FLOW OUT (in/hr)	SWALE DISCHARGE COEFFICIENT C_v (volume)	SWALE PEAK FLOW COEFFICIENT C_p	MASS BALANCE INFILTRATION RATE (in/hr)
1	110	6.14	3.15	17.5	35.0	5.25	2.77	0.51	0.53	0.84
2	100	12.34	1.43	9.5	38.0	12.19	2.57	0.12	0.21	8.84
3	90	15.60	11.58	28.35	41.4	11.41	8.56	0.74	0.75	2.79
4	60	48.13	32.07	26.0	38.5	41.71	29.9	0.67	0.72	11.20
5	60	53.48	25.0	16.8	36.4	41.18	20.32	0.47	0.49	18.90
6	120	26.74	9.91	16.8	36.4	20.59	8.29	0.37	0.41	8.42

TABLE 8

FLOW DATA FOR SWALE AT INTERSTATE 4 - WEST

EXP. NO.	DISTANCE BETWEEN WEIRS (ft)	FLOW IN (in)	FLOW OUT (in)	BEGINNING WATER CONTENT (%)	ENDING WATER CONTENT (%)	PEAK FLOW IN (in/hr)	PEAK FLOW OUT (in/hr)	SWALE DISCHARGE COEFFICIENT C_v (volume)	SWALE PEAK FLOW COEFFICIENT C_p	MASS BALANCE INFILTRATION RATE (in/hr)
1	66	7.29	3.34	24.25	40	0.38	0.19	0.46	0.50	2.15
2	66	36.89	16.25	19.61	23.27	3.16	1.54	0.44	0.49	7.63
3	145	19.92	11.28	29.75	37.75	0.70	0.42	0.57	0.60	2.47

TABLE 9

FLOW DATA FOR SWALE AT INTERSTATE 4 - EAST

EXP. NO.	DISTANCE BETWEEN WEIRS (ft)	FLOW IN (in)	FLOW OUT (in)	BEGINNING WATER CONTENT (%)	ENDING WATER CONTENT (%)	PEAK FLOW IN (in/hr)	PEAK FLOW OUT (in/hr)	SWALE DISCHARGE COEFFICIENT C_v (volume)	SWALE PEAK FLOW COEFFICIENT C_p	MASS BALANCE INFILTRATION RATE (in/hr)
1	72	13.37	0.59	8.3	37.2	3.57	0.67	0.04	0.19	3.19
2	30	21.4	14.26	32.3	46	40.6	32.7	0.67	0.81	9.52
3	60	10.69	5.35	32.3	46	20.3	12.8	0.50	0.63	6.29

details on length of swale in which the mass balance method is performed. It can be noted that different lengths of swales are chosen. Also, in these tables are listed the flow of water input into the swale system in each experiment, as well as the flow of water out of the system. These values are necessary to compute the volumetric discharge coefficient for each experiment. Both the peak flow and the volumetric coefficient of discharge can be defined as the amount of the inflow (in percent) that goes out of the system (runoff). In tables 5 through 9, information for the water content before and after each experiment is provided. The results of the experiments clearly indicate that the higher the value of the beginning water content, the smaller the value of the infiltration rate, and thereby, the higher the value of the volumetric coefficient of discharge, C_v . Finally, in tables 5 through 9 are listed the values of the peak value of the flow into the system, and the peak value of the flow out of the system from which the peak flow coefficient of discharge is computed. These peak flow coefficients of discharge increase with an increase in beginning water content.

These values of flow in and flow out listed in tables 5 through 9 are computed by obtaining the area under the plots of flow of water versus time. These plots are shown in figures 14 to 33 in Appendix B. The peak flow in and the peak flow out are also obtained directly from these graphs. It can be easily seen that the discharge

coefficient increases as the moisture content increases, and the coefficient of discharge decreases as the length of swale is increased.

Several sources of error are faced in this experiment. Regardless of measurement errors that are always encountered in field experimentations, it should be pointed out that flow measuring devices such as weirs are a source of errors because they have to be placed perpendicular to the flow line, in a position that produces minimum backwater conditions. Also, each weir has to penetrate the ground approximately the same depth, and this is usually difficult to achieve. The fact that the longitudinal slope of the swale varies along its length is minimized by computing the average flow of water through the swale. Therefore, the discharge coefficient based on volume of flow yields a more representative value than the coefficient of discharge based on peak flow.

CHAPTER V
DESIGN METHODOLOGY

Introduction

In recent years, it has been considered a priority to develop a procedure for proper design of swale systems. It is the intention of this report to present a design procedure for swales that considers many factors affecting the swale infiltration volume. This design procedure is developed for the two most common swale shapes, namely trapezoidal and triangular shapes. The procedure has been developed so that a proper value for each parameter may be chosen. This is very important because restrictions vary from place to place, and either if space is limited, or if an uncommon value of the roughness coefficient (n), a coefficient that describes the roughness of a channel, is found, this design procedure can be followed to estimate the proper geometry of a swale. It should also be noted that this design procedure has been checked two times in the field with margins of error less than 10% in every case. Finally, these design equations are expressed in both the SI system of units and the US customary system of units. Therefore, the designer should be very careful in choosing the appropriate units for each parameter.

Triangular Shape Swale

From the definition of depth of flow for triangular sections:

$$D = \frac{P}{Z\sqrt{1 + Z^2}} \quad (1)$$

where:

D = depth of flow

P = wetted perimeter

Z = horizontal distance per one-foot change in side slope

and, from Manning's equation for uniform flow:

$$Q = \frac{1}{n} AR^{2/3} S^{1/2} \quad (2)$$

where:

n = Manning's roughness coefficient

A = cross-sectional area of flow

R = hydraulic radius

S = longitudinal slope

The length of swale (L) necessary to percolate the runoff (Q) for the given conditions can be defined as:

$$L = \frac{K Q^{5/8} S^{3/16}}{n^{3/8} i} \quad (3)$$

where:

$$K = \frac{21,032 Z^{5/8}}{(1 + Z^2)^{5/8}} \quad (4)$$

if the US customary system of units is used, and:

$$K = \frac{151,361 Z^{3/8}}{(1 + Z^2)^{5/8}} \quad (5)$$

if the SI system of units is used.

In Table 10, there are listed the values for K in both systems of units for different values of Z.

TABLE 10
CONSTANT (K) FOR DESIGN EQUATION FOR TRIANGULAR SHAPE

Z	K (US UNITS)	K (SI UNITS)
1	10,516	98,145
2	9,600	71,787
3	8,446	54,192
4	7,514	43,327
5	6,784	36,122
6	6,203	31,024
7	5,730	27,231
8	5,337	24,300
9	5,006	21,965
10	4,722	20,059

The derivation of equation (3) can be found in Appendix C.

A sensitivity analysis for the retardance coefficient (n) shows that the value of n is also very significant. This sensitivity analysis, shown in Table 11, is done for the case study at Interstate 4 - East, near Maitland, Florida. It can be seen that by doubling

the value of n from 0.02 to 0.04, the necessary length of swale changes (increases) by approximately 25%.

TABLE 11
SENSITIVITY ANALYSIS FOR ROUGHNESS
COEFFICIENT AT INTERSTATE 4 - EAST

n	L (ft)
.02	319
.03	273
.04	245
.05	226
.06	211
.07	199
.08	189

Trapezoidal Shape Swale

Applying the same principles used for the triangular section, and the fact that the most efficient trapezoidal section can be defined by:

$$\frac{B}{D} = 2 [(1 + Z^2)^{1/2} - Z] \quad (6)$$

the following equations are derived:

$$L = \frac{43,200 Q}{\left\{ B + 2 \left[\frac{1.068 n Q (1 + Z^2)^{1/3}}{S^{1/2} Z^{2/3} 2[(1 + Z^2)^{1/2} - Z]} \right] \right\}^{3/8} (1 + Z^2)^{1/2}} \quad (7)$$

if the US customary system of units is used, and:

$$L = \frac{360,000Q}{\left[B + \frac{2Q^{3/5} (B + \sqrt{1+Z^2} - Z)^{2/5} n^{3/5} \sqrt{1+Z^2}}{B + \frac{BZ}{2(1+Z^2 - Z)}} \right] i} \quad (8)$$

where:

Q = average flow rate

L = length of swale

i = actual infiltration rate

n = Manning's roughness coefficient

Z = horizontal distance per one-foot change in side slope

S = longitudinal slope

B = bottom width of swale

Derivations of equations (7) and (8) can be found in Appendix D.

CHAPTER VI

CASE STUDIES

Two sites were chosen to calibrate and verify the equations for calculating the necessary length of swale to infiltrate a certain runoff (Q), for the given soil geometric conditions. It must be noted that the values of the infiltration rate were obtained by using field hydrographs and the mass balance method. Therefore, its value should be considered very accurate. Also, the flow rate was from the input hydrograph developed in the field. However, an average flow rate is used in the length of swale equations, whereas the hydrograph is an expression of variable flow rates that change with time. The two sites (a swale at Interstate 4 - east, near Maitland, Florida, and a swale at Reed Road in the Chuluota area of Florida) were chosen based on the long length of the swale at each site.

Experiment at Interstate 4 - East

From Table 3, it can be seen that the longitudinal slope (S) is 0.0279, and from Table 2, a value for the side slope (Z) of 7 is obtained. A triangular shape can best represent the geometry of the swale. For this location, a value of 0.05 for the roughness coefficient (n) is recommended (Wanielista et al. 1985). From Figure 21 in Appendix B, a volume of water $V = 160.4 \text{ ft}^3$ in 51 minutes is obtained, with a value for infiltration rate (i) of 6.29 in/hr. In

actual design, a double-ring infiltrometer or published results can be used to estimate the actual infiltration rate. For design procedure, various cross-sectional geometries can be tried, based on practicality and economy.

Summarizing triangular shape:

$$n = 0.05$$

$$S = 0.0279$$

$$Q = \frac{160.4 \text{ ft}^3}{(51 \text{ min})(60 \text{ sec/min})} = 0.052 \text{ cfs}$$

$$i = 6.29 \text{ in/hr}$$

$$Z = 7$$

Equations (3) and (4) may be utilized. Also, Table 10 can be used to obtain a value of K for Z = 7, which for US customary units is:

$$K = 5,730$$

and

$$L = \frac{K Q^{5/8} S^{3/16}}{n^{3/8} i}$$

Plugging in the values:

$$L = \frac{5,730 (.052 \text{ cfs})^{5/8} (.0279)^{3/16}}{(.05)^{3/8} (6.29 \text{ in/hr})}$$

Solving:

$$L = 226 \text{ ft}$$

The length of swale necessary to infiltrate this runoff (Q) is measured in the field as L = 225 ft. This represents an error of approximately 0.29%. Possible sources of error are listed in Chapter IV.

Experiment at Reed Road

What follows is a summary of the different parameters for this experiment at Reed Road.

Triangular shape:

$$n = 0.05$$

$$Q = \frac{802.1 \text{ ft}^3}{(120 \text{ min})(60 \text{ sec/min})} = 0.111 \text{ cfs}$$

$$i = 8.43 \text{ in/hr}$$

$$Z = 6$$

$$S = 0.0133$$

From Table 10, it is found that for Z = 6, K = 6,203. Using equation (3):

$$L = \frac{K Q^{5/8} S^{3/16}}{n^{3/8} i}$$

For this case:

$$L = \frac{6,203 (0.11 \text{ cfs})^{5/8} (.0133)^{3/16}}{(.05)^{3/8} (8.42 \text{ in/hr})}$$

Solving:

$$L = 253.67$$

The length of swale necessary to infiltrate a runoff of 0.111 cfs, for the site at Reed Road, was measured in the field to be $L = 278$ ft. This represents an error of approximately 8.75% with the value obtained with the design equation.

The two cases studied appear to verify the validity of the design equation to predict the length of swale required to percolate a certain runoff (Q).

For design, the most conservative value of published permeability is recommended. If this approach is used for the experiment at Interstate 4 - East, using the design equation, the length of swale is found to be $L = 305.7$ ft. This length of swale is based on using the lower limit of the range of values presented by the SCS report listed in Table 3.

Using the design equation for the case study at Reed Road, with the lower limit of the SCS permeability report as the actual value, a length of swale of 234 ft is found. This approach for design shows that the values for permeability listed by the SCS report could lead the designer to under-design the swale.

CHAPTER VII
CONCLUSIONS AND RECOMMENDATIONS

Introduction

This study provides an analysis of several different parameters affecting swale design and operation, based on existing literature and experience, and on the field observation of such parameters to culminate with a design procedure for swales. Five different swales, representing different soil conditions and topography, were chosen to obtain specific information which could be used to specify a range of design conditions. Twenty-two experiments were performed in these locations and the hydrograph and soil information of each can be seen in Appendices A and B. Field studies to determine infiltration capacity, as well as laboratory studies to determine soil physical parameters, are used to investigate their effect on the infiltration efficiency of the swales.

Infiltration

Twenty-two experiments were performed in five different sites to determine a field rate of infiltration. It was concluded that the field rate of infiltration can be estimated from a mass balance of flows. It varied among sites and experiments at a site. It was also concluded that the infiltration rate varies inversely with the

moisture content of the soil. When field hydrograph data are not available, infiltration can be estimated from published and laboratory permeabilities. The rate of infiltration was predicted more accurately from the double-ring infiltrometer than from the lab permeability. If the double-ring infiltrometer can be used, a value of infiltration rate equal to one-half of the value obtained with the double-ring method is recommended. If the lab permeability can be obtained, also a value of one-half of the permeability should be used as the infiltration rate in order to use the design equation. However, from Table 4, rates vary from 56% to 94% of the lab permeability. This range of values seems to indicate that actual infiltration rates cannot be predicted accurately from lab permeability. Thus, the moisture content probably affects actual permeability.

When field hydrograph data is not accessible, the rate of infiltration could be estimated from published data. An example of published data would be the soil surveys for a region performed by the Soil Conservation Service (SCS). However, it is important to note that the SCS publications present an extensive range of permeability values for each location. Therefore, the designer should use the most conservative value for the infiltration rate. When few estimates are available, the lower of each estimate would be used to determine how each value would affect the geometry of the swale, and then make the proper selection for the final design.

Design Equation

In appendices C and D are the derivations for the design equations for triangular and trapezoidal shapes. In both, the SI system and the US customary system of units are the design equations presented. It is obvious from those equations that one of the most important parameters for the design of swales is the infiltration rate (i). The length of swale is inversely related to the infiltration rate. If the estimate of the infiltration rate is twice the actual infiltration rate, then the design equation would yield a value of the length of swale of one-half of the needed length. From Table 10, it can also be seen that the value of the side slope (Z) has a great effect on the length of the swale. An increment of ten times in the side slope (Z) results in a decrease of three times in the length of the swale. Therefore, if possible, the designer should use several geometries and decide on the best from a practical and economical standpoint. Parameters such as slope (S) and rainfall excess (Q) would depend more on the topography and watershed area of the sites, and on the storm events used for design.

It can be concluded that all the parameters are very significant to compute the length of swale needed. However, emphasis must be made on predicting a reasonable rate of infiltration because it has the greatest effect on the accuracy of the design. It is recommended that the length of swale equations be used for hydrologic design of swales.

Future Recommendations

This report emphasized the infiltration rates for a swale receiving waters from a point source, such as inlets, culverts, etc. Based on this limitation, the following recommendations for future work are stated:

1. Develop equations to determine the length of a swale for overland flows (multiple inputs) into a swale.
2. Seek better relationships between the mass balance infiltration rates and other measures of permeability.
3. Develop a dimensionless plot for the design equation which would aid the designer to predict the length of swale for given conditions.
4. Investigate the effect on the infiltration rate if it is calculated using the mass balance method during the latter portion of flow.

APPENDICES

APPENDIX A
SIEVE ANALYSIS FOR SOILS OF SWALES STUDIED


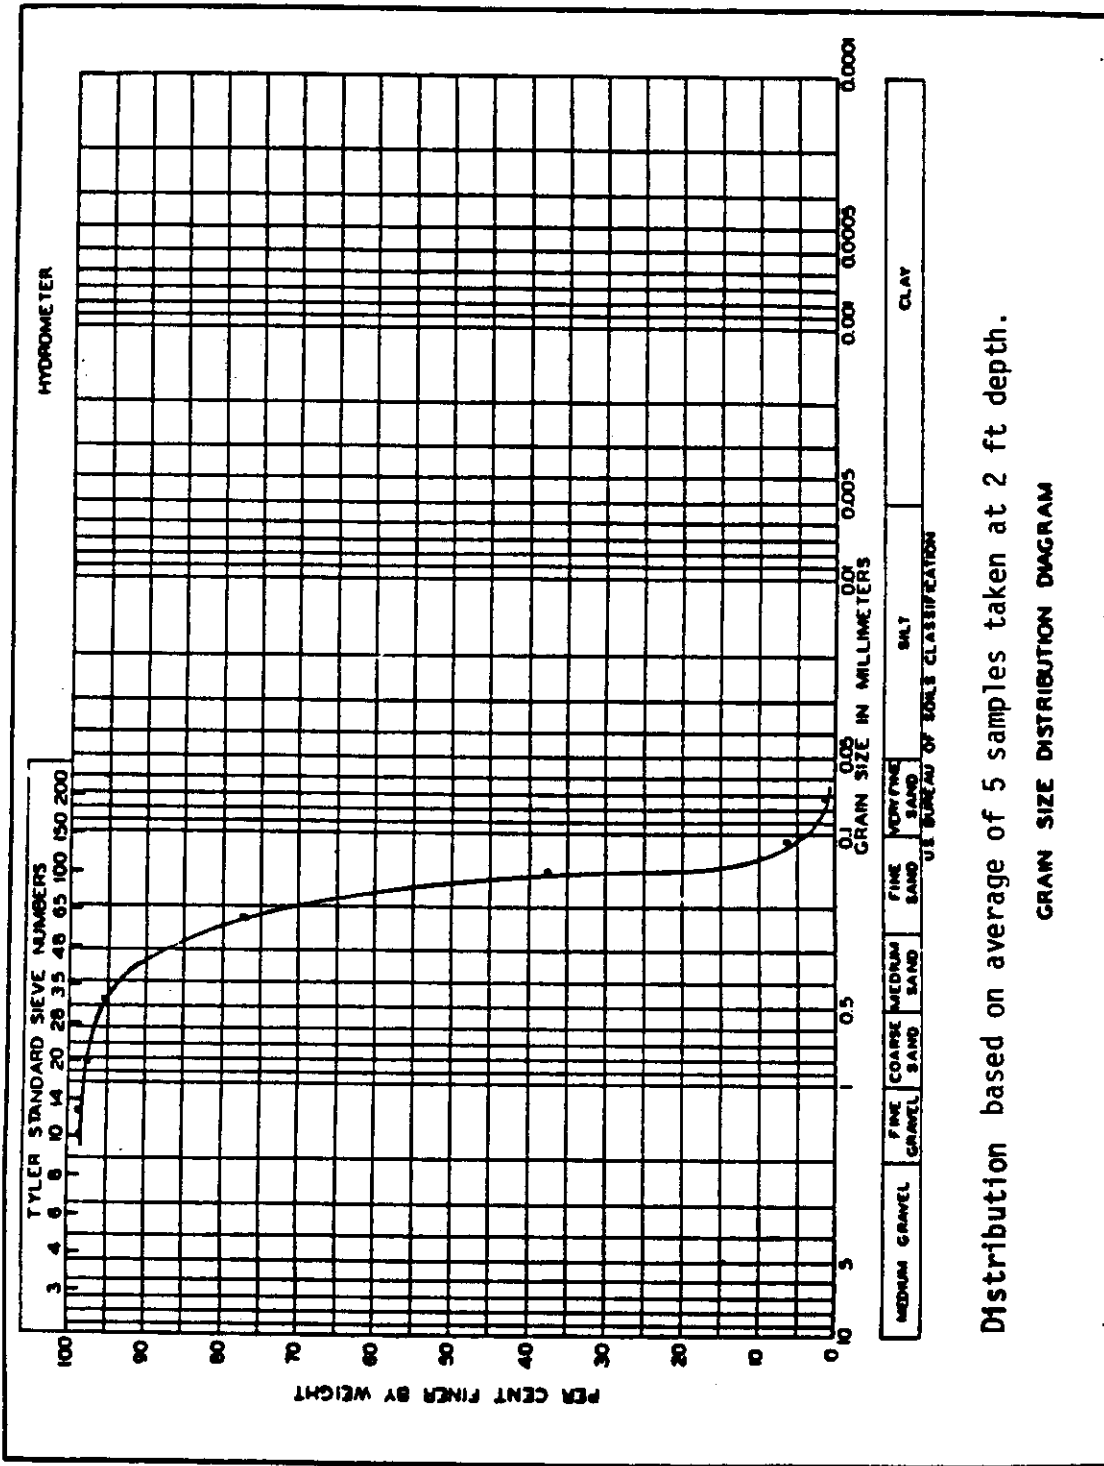



Figure 9. Grain Size Distribution Diagram - Red Bug Lake Road Swale.

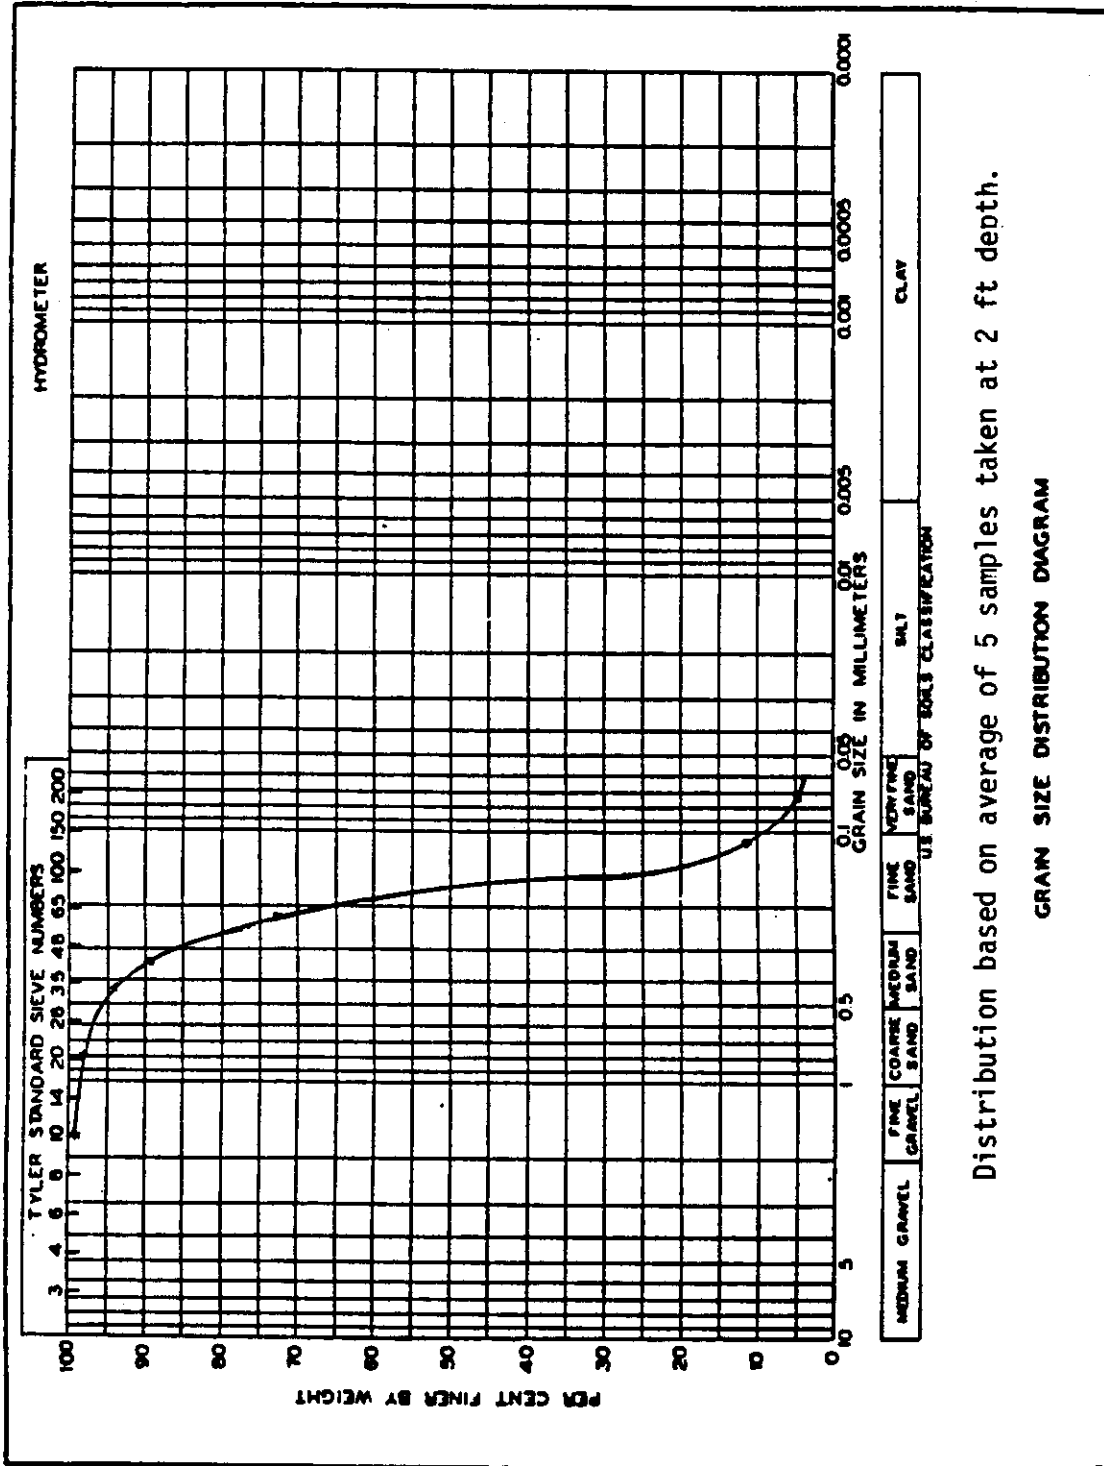

Distribution based on average of 5 samples taken at 2 ft depth.

GRAIN SIZE DISTRIBUTION DIAGRAM


Figure 10. Grain Size Distribution Diagram - Reed Road Swales.

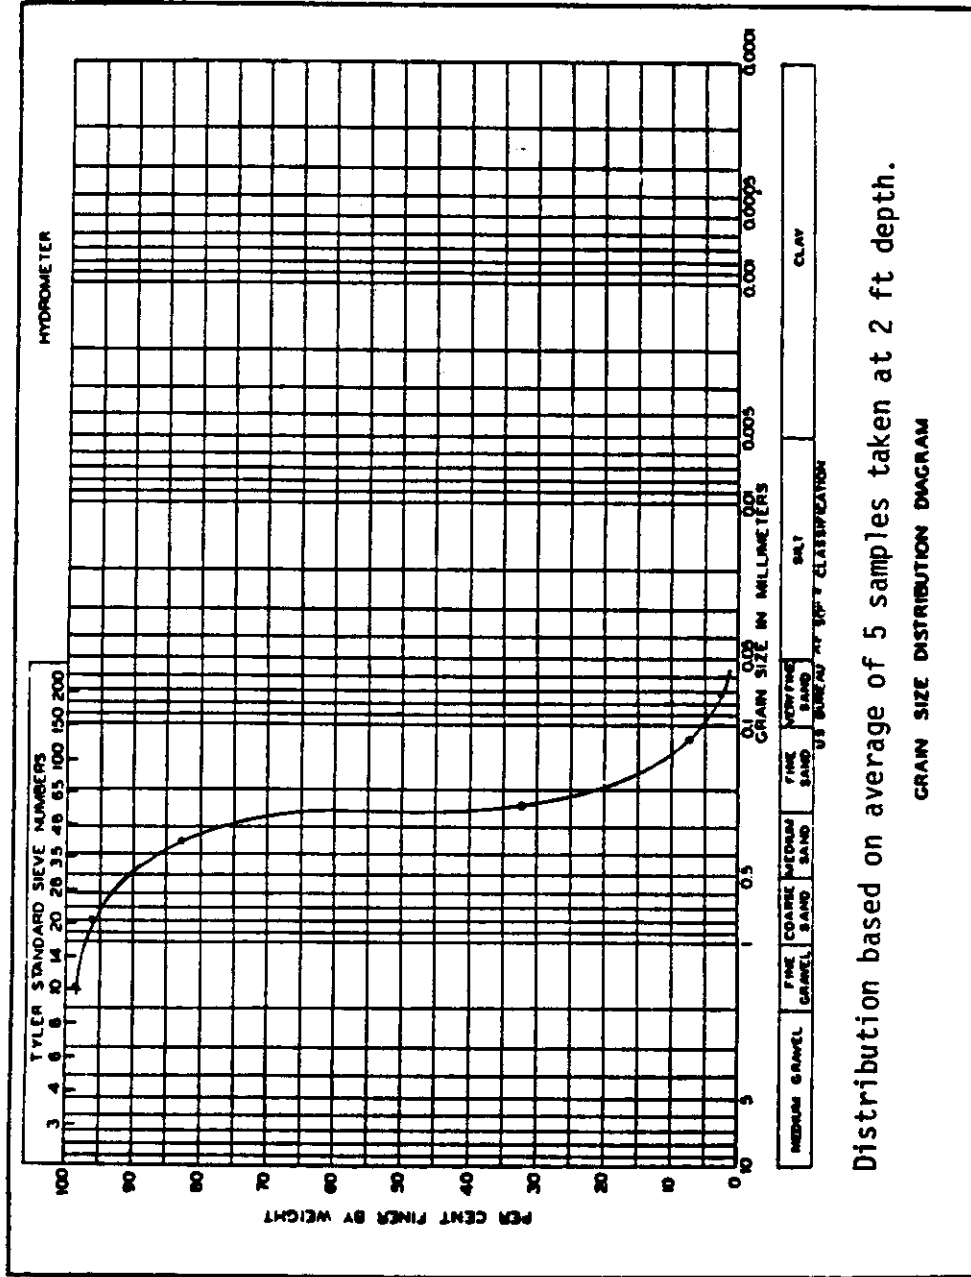

Distribution based on average of 5 samples taken at 2 ft depth.

GRAIN SIZE DISTRIBUTION DIAGRAM


Figure 11. Grain Size Distribution Diagram - Maitland Interchange - West Swale.

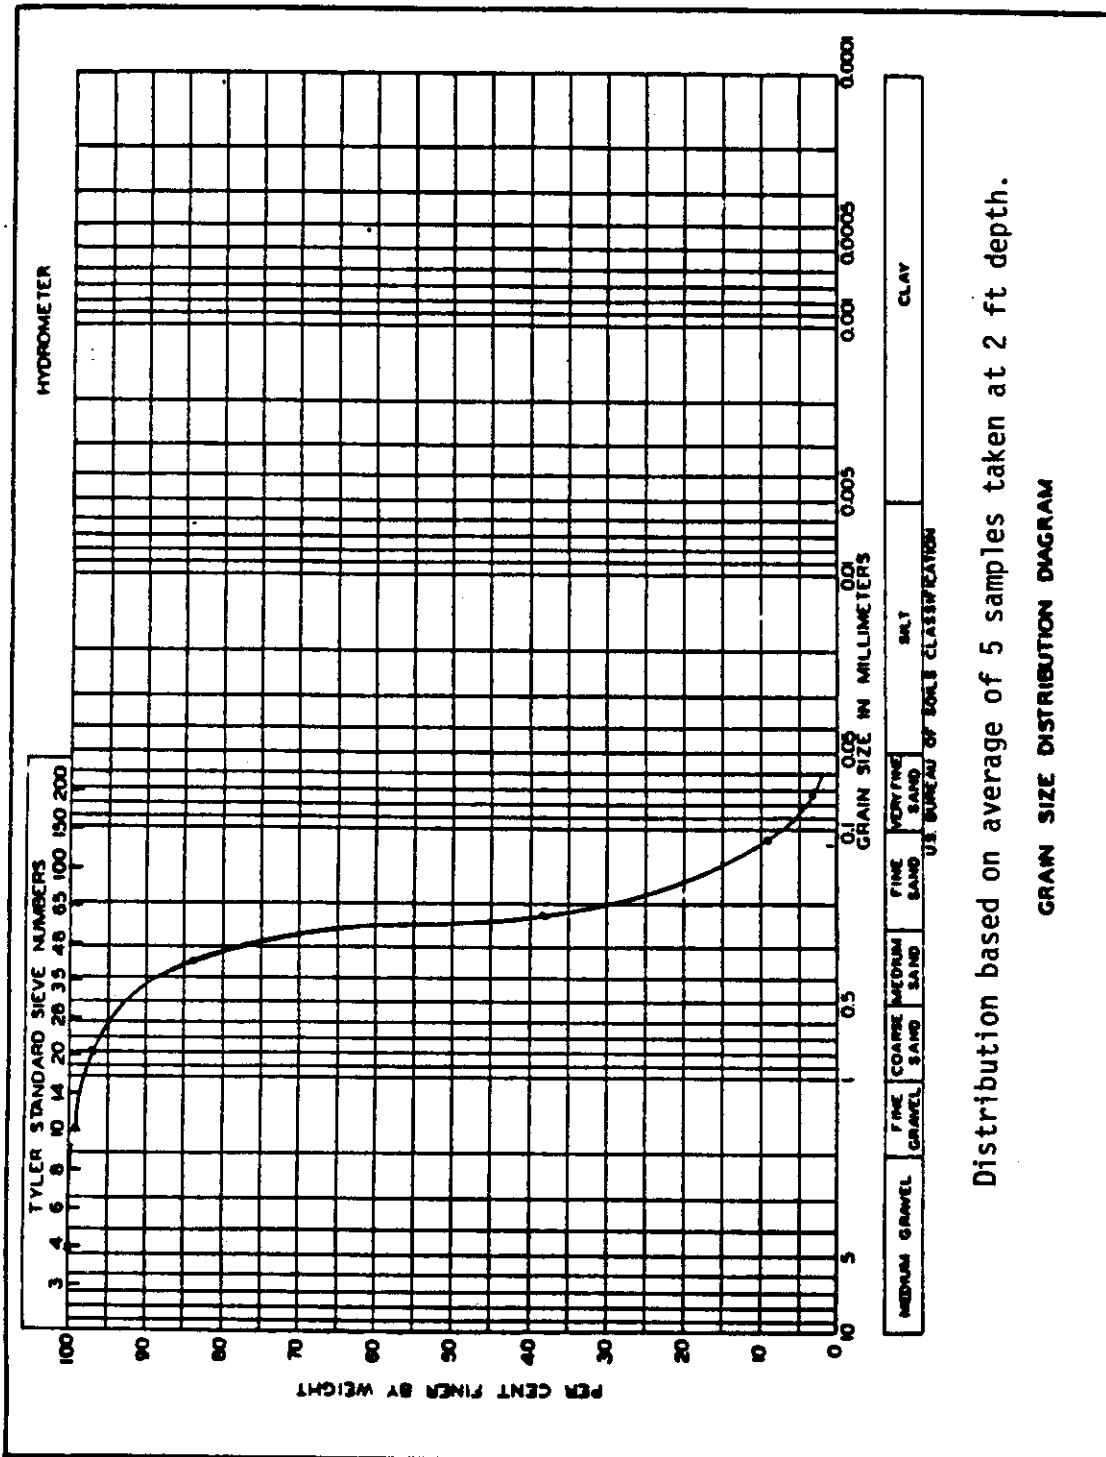

Distribution based on average of 5 samples taken at 2 ft depth.

GRAIN SIZE DISTRIBUTION DIAGRAM

Figure 12. Grain Size Distribution Diagram - Maitland Interchange - East Swale.

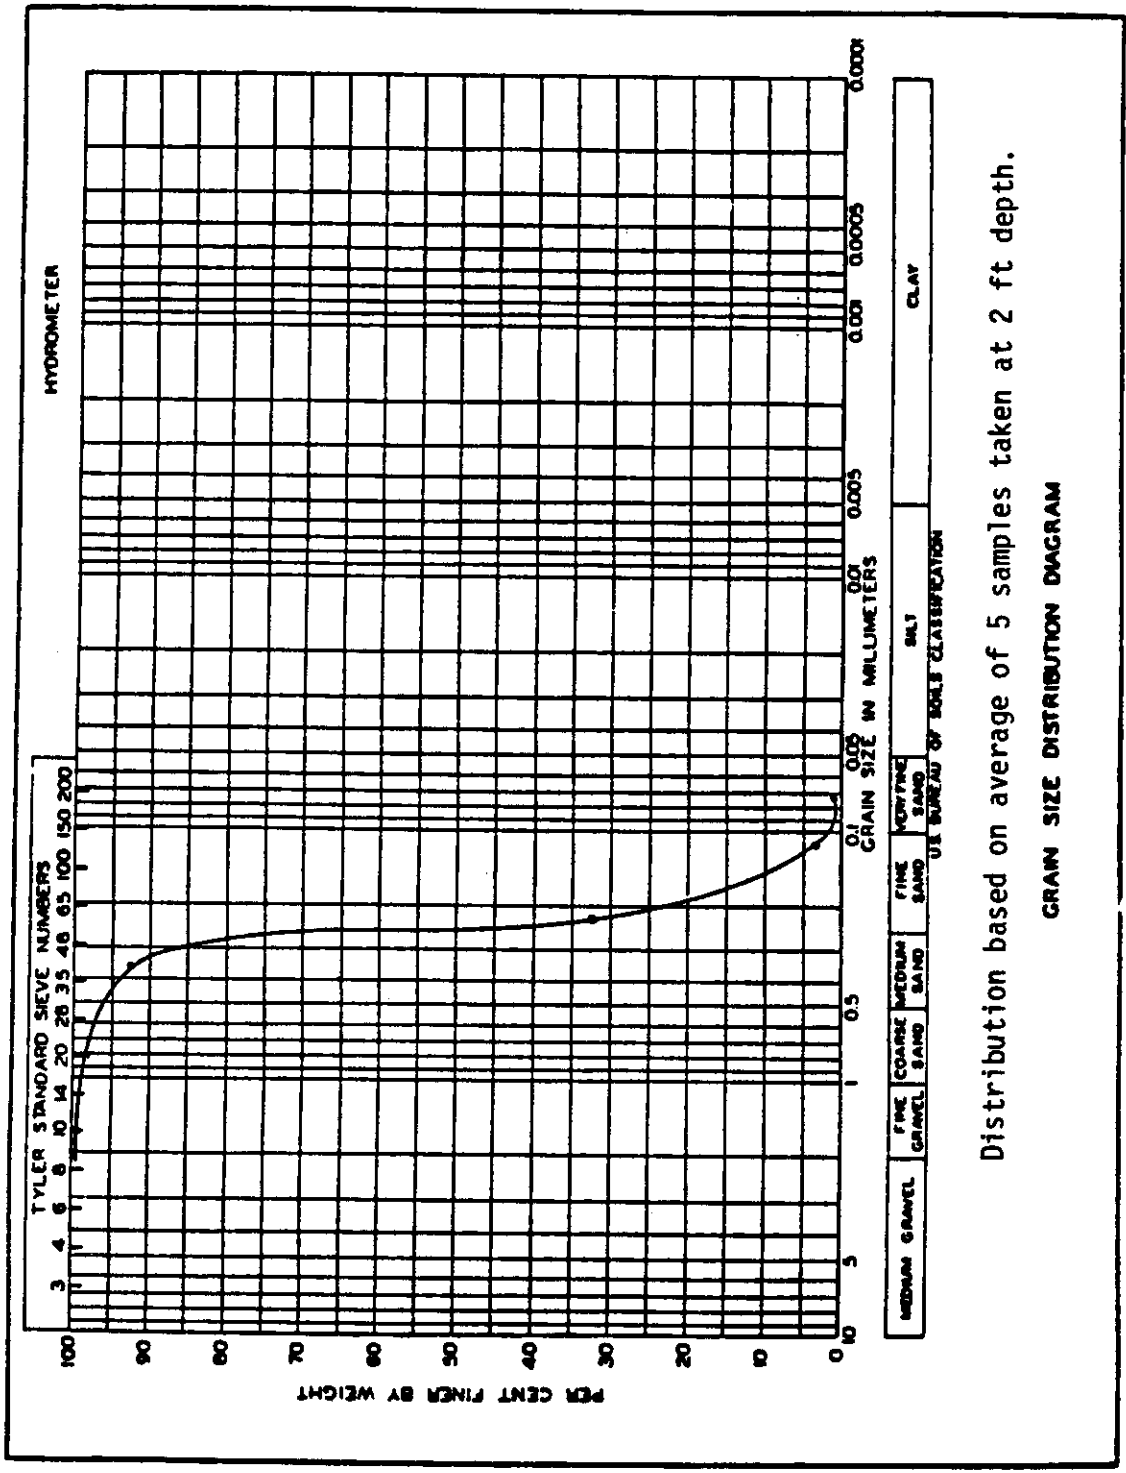

Distribution based on average of 5 samples taken at 2 ft depth.

GRAIN SIZE DISTRIBUTION DIAGRAM

Figure 13. Grain Size Distribution - S.R. 426 Swale.

APPENDIX B
HYDROGRAPHS FOR SWALE EXPERIMENTS

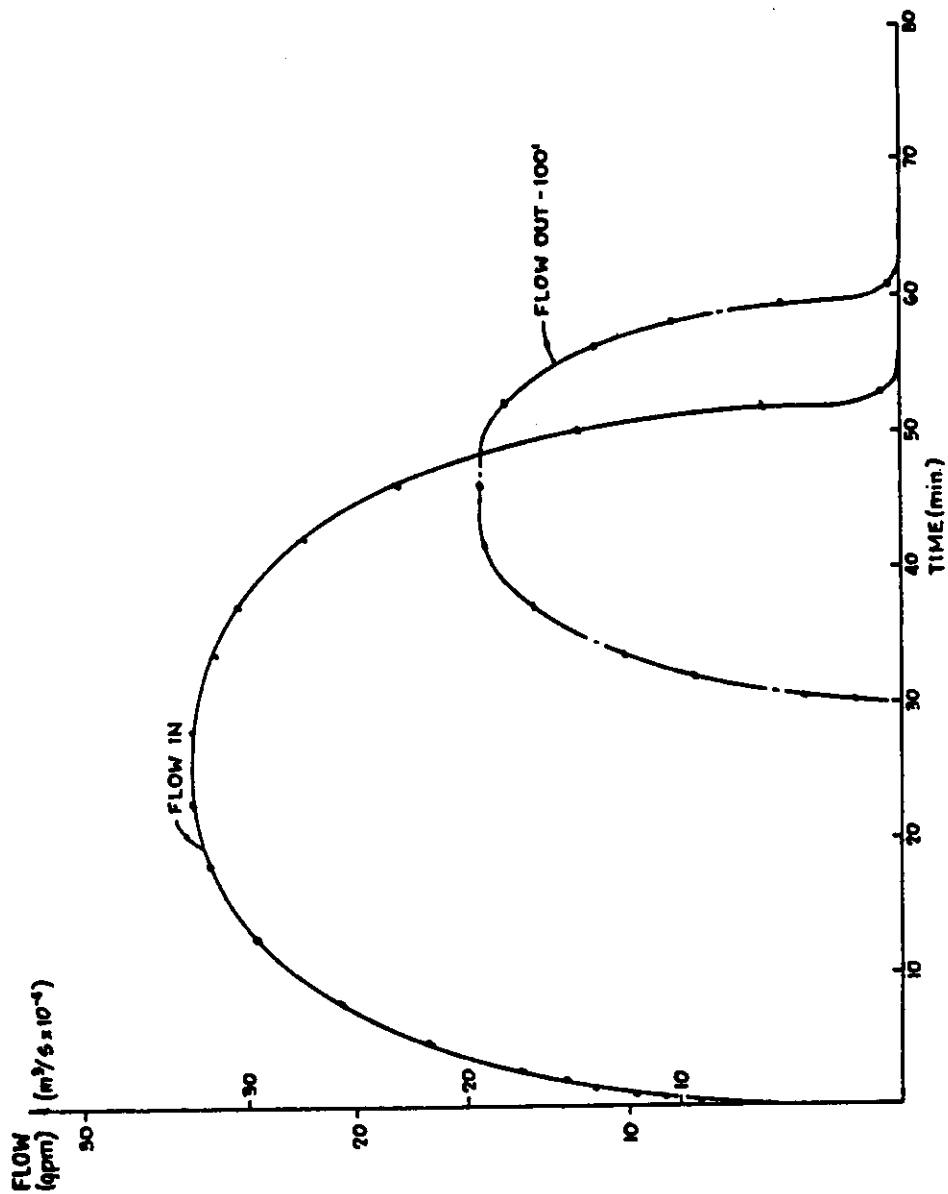


Figure 14. Swale at Sunrise Place - Experiment No. 1.

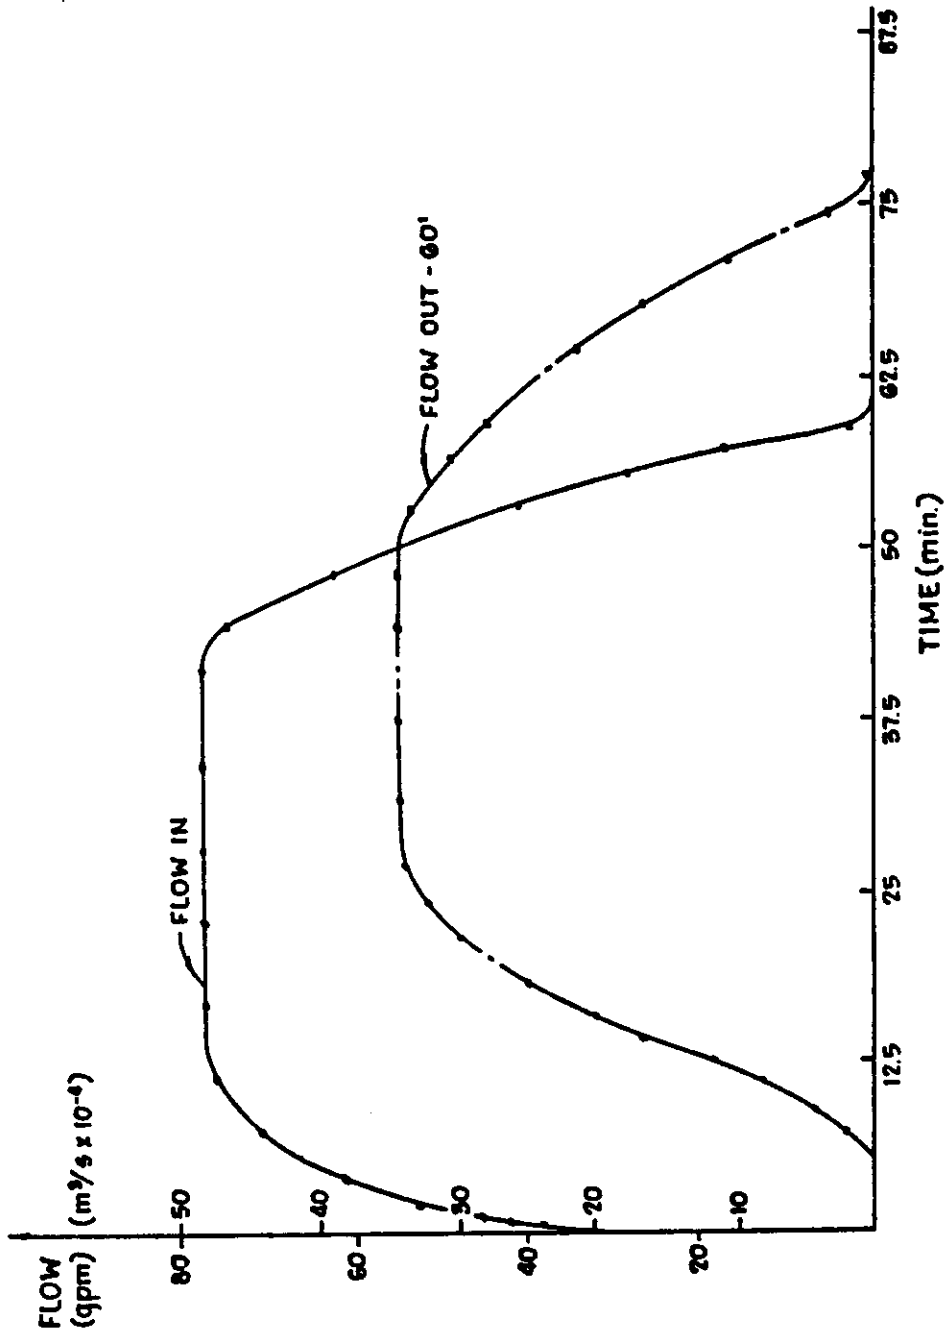


Figure 15. Swale at Sunrise Place - Experiment No. 3.

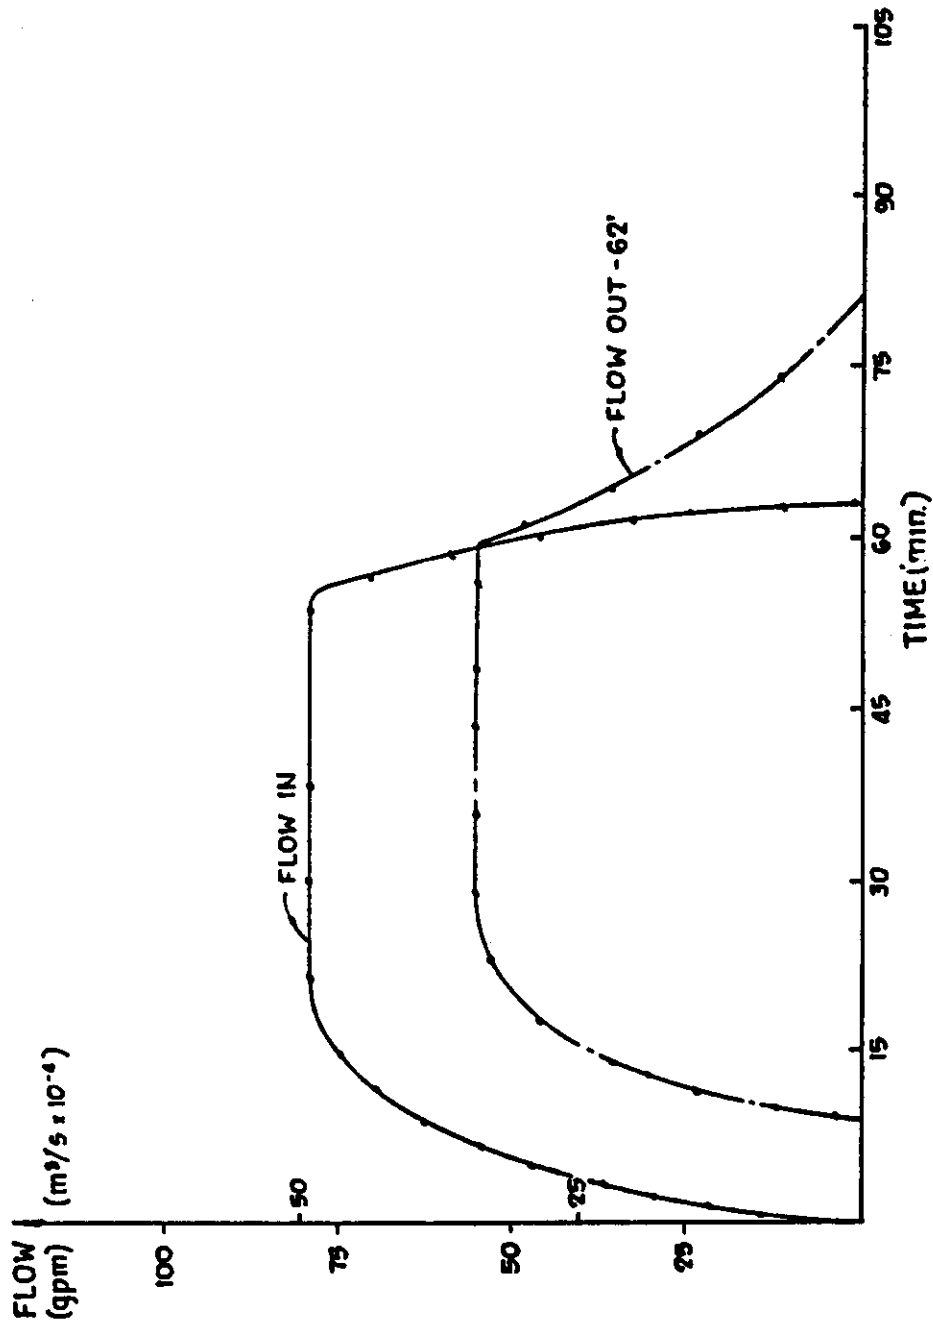


Figure 16. Swale at Sunrise Place - Experiment No. 4.

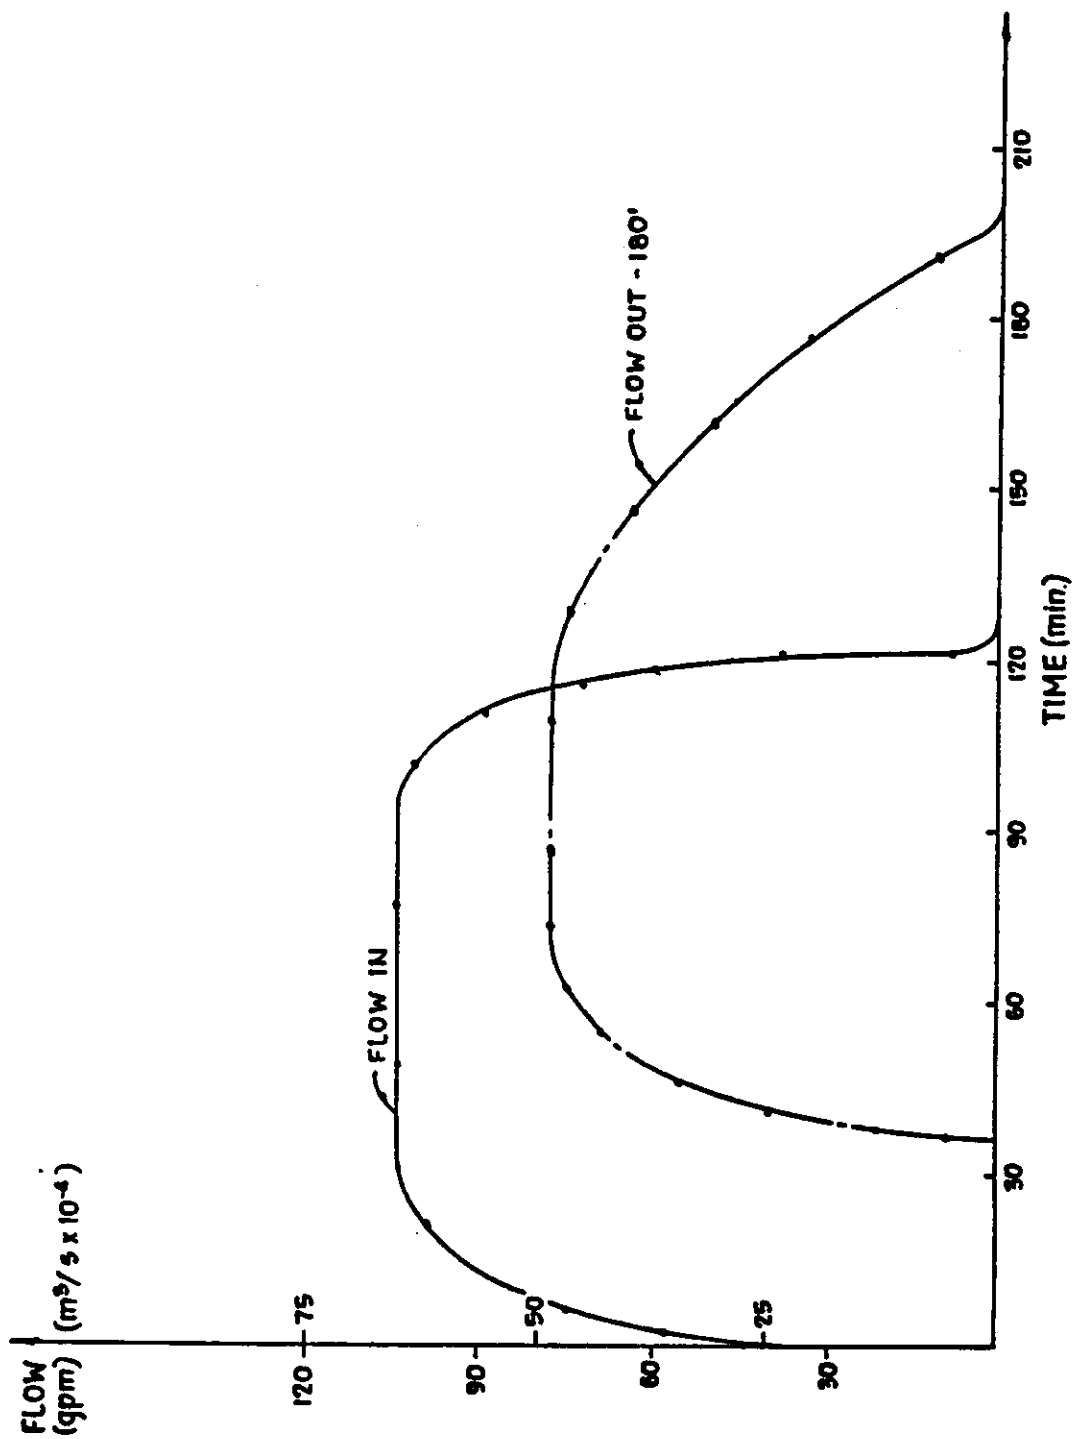


Figure 17. Swale at Sunrise Place - Experiment No. 5.

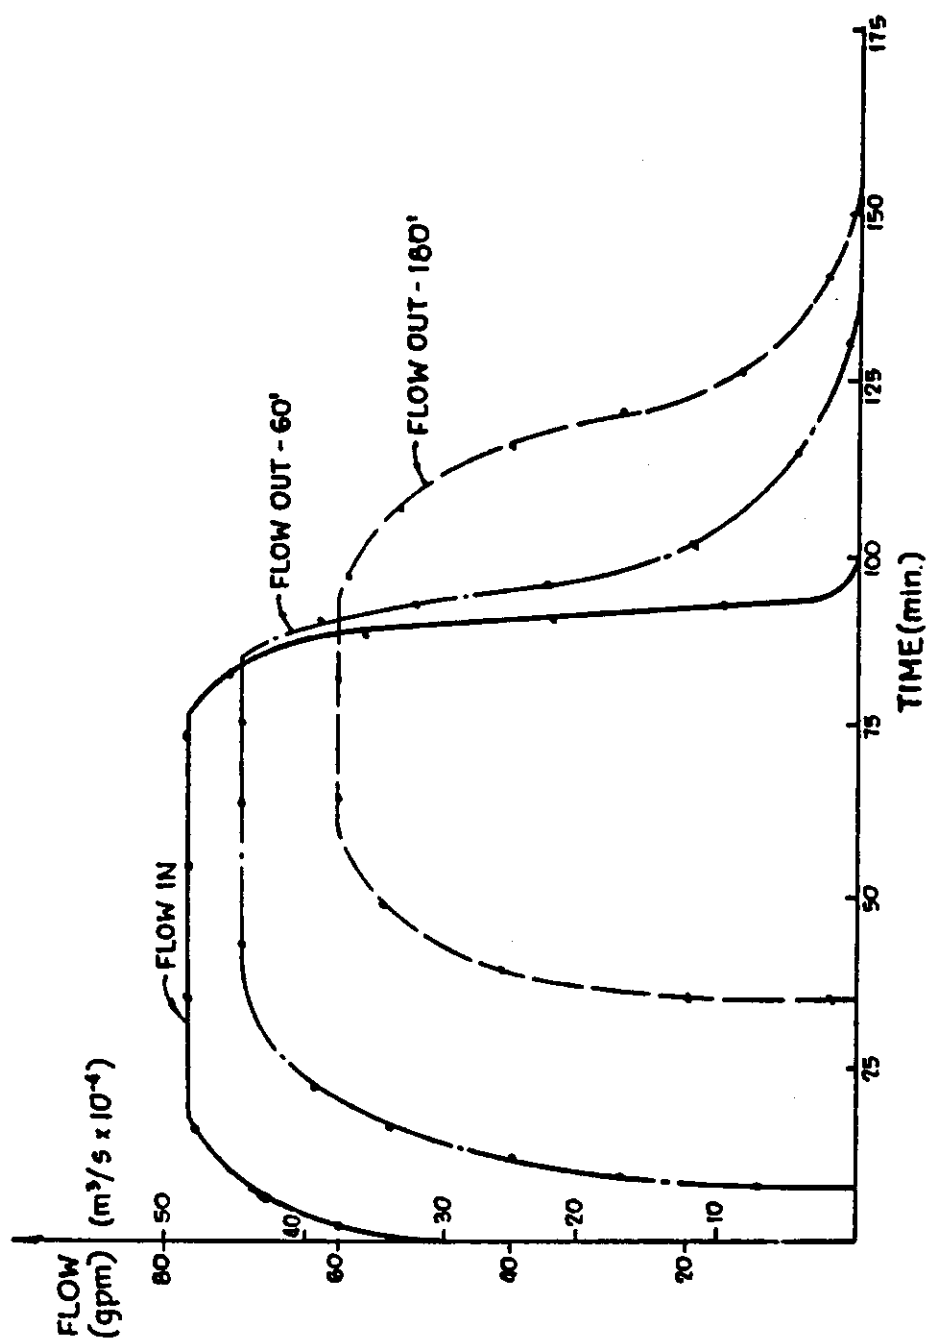


Figure 18. Swale at Sunrise Place - Experiments No. 6 and 7.

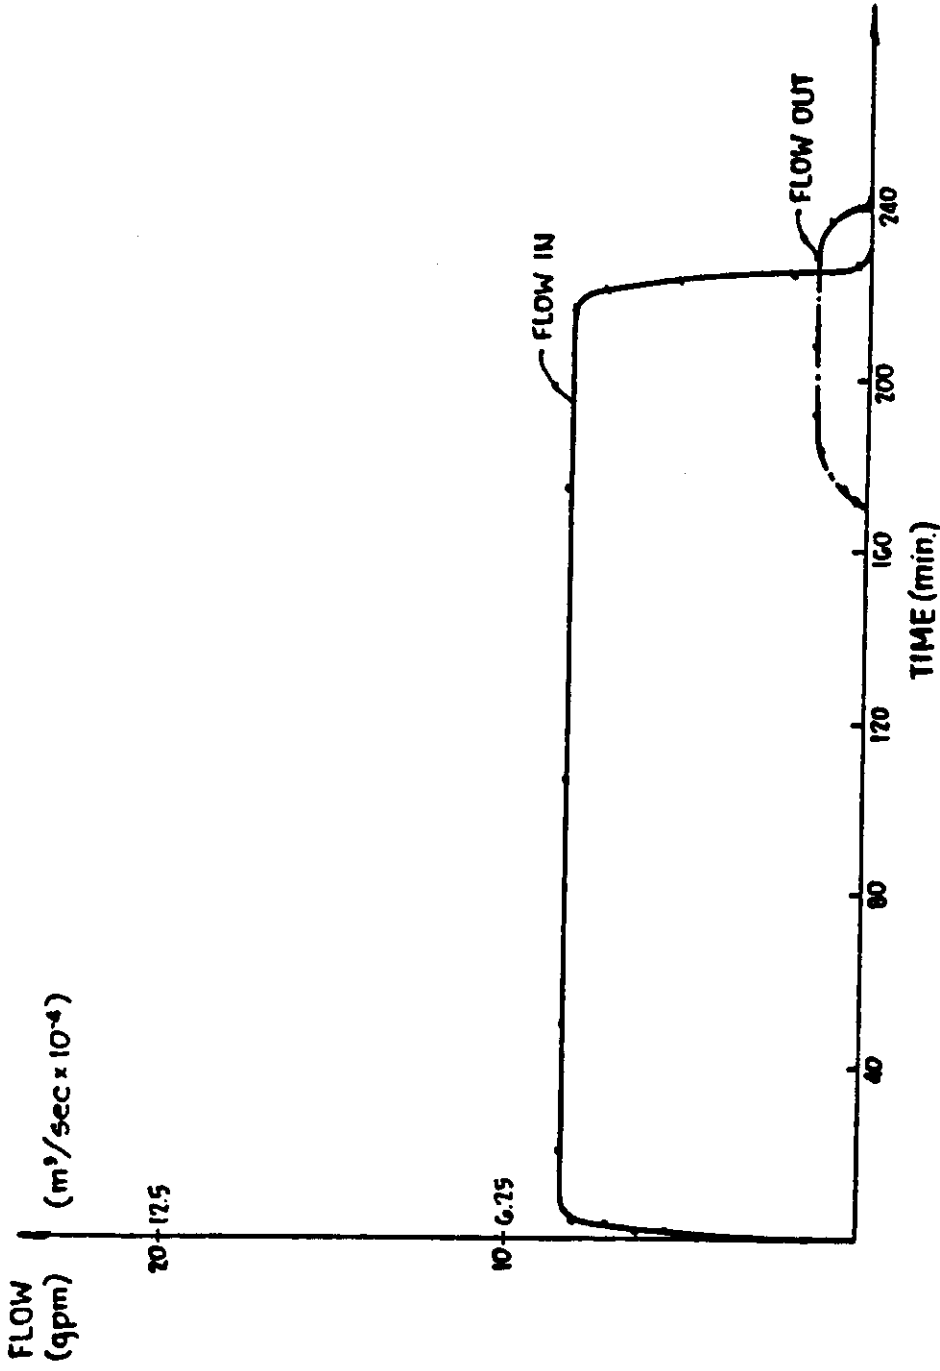


Figure 19. Swale at I-4 East - Experiment No. 1.

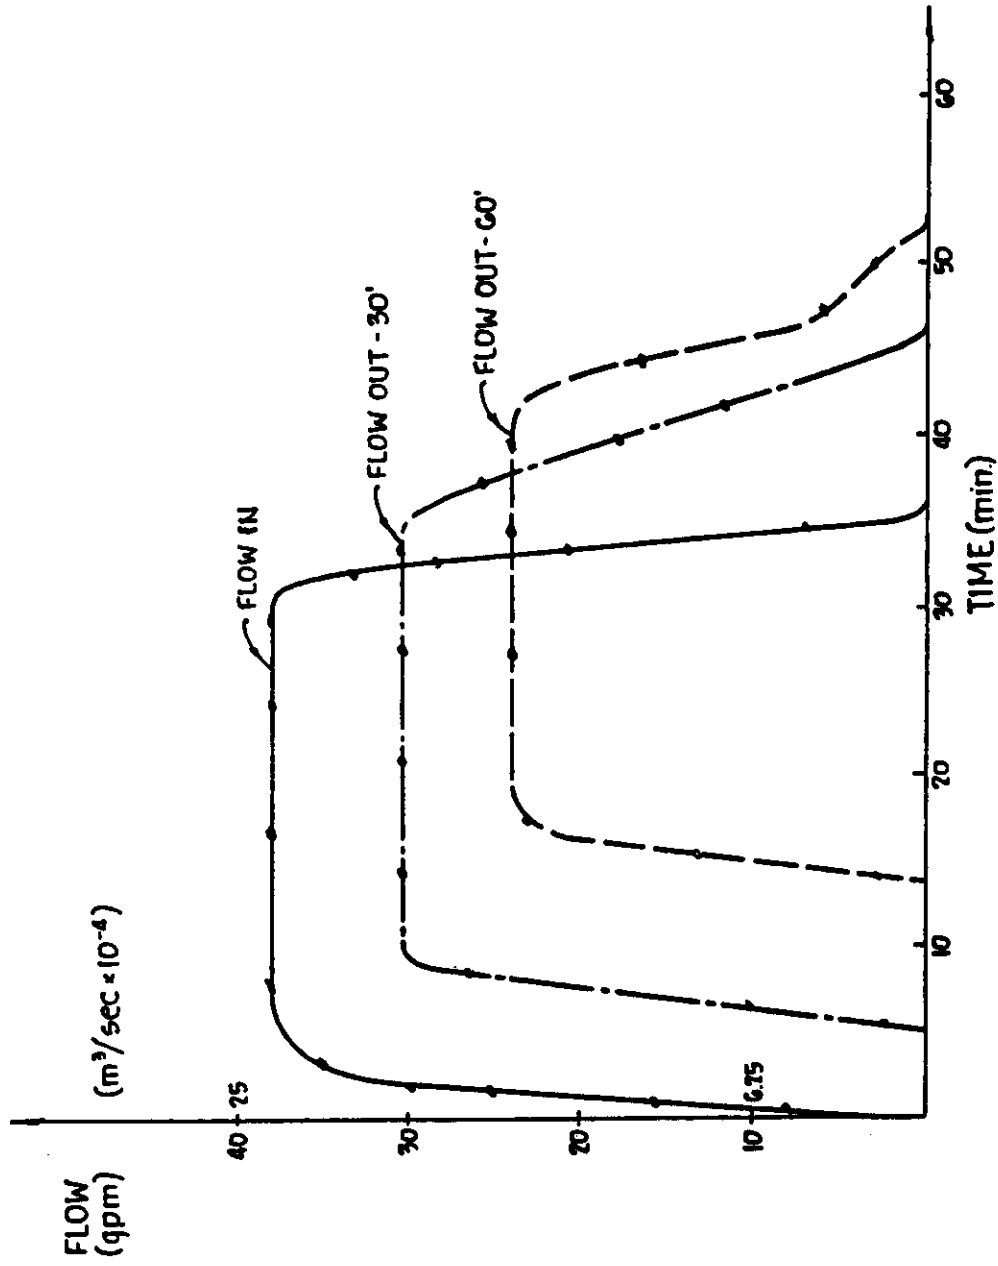


Figure 20. Swale at I-4 East - Experiments No. 2 and 3.

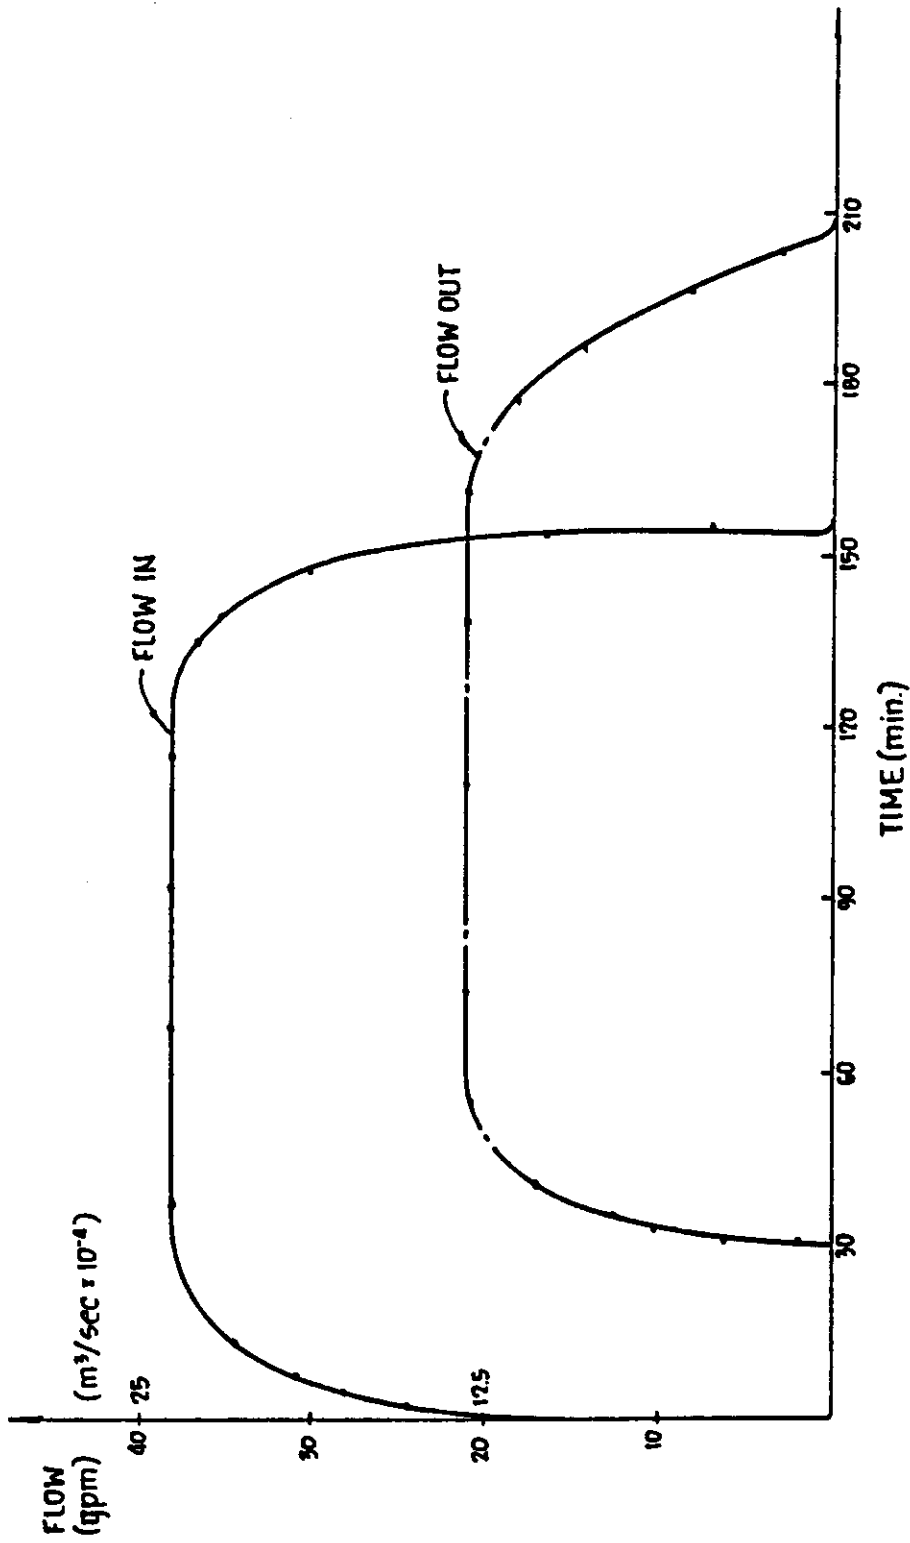


Figure 21. Swale at I-4 West - Experiment No. 1.

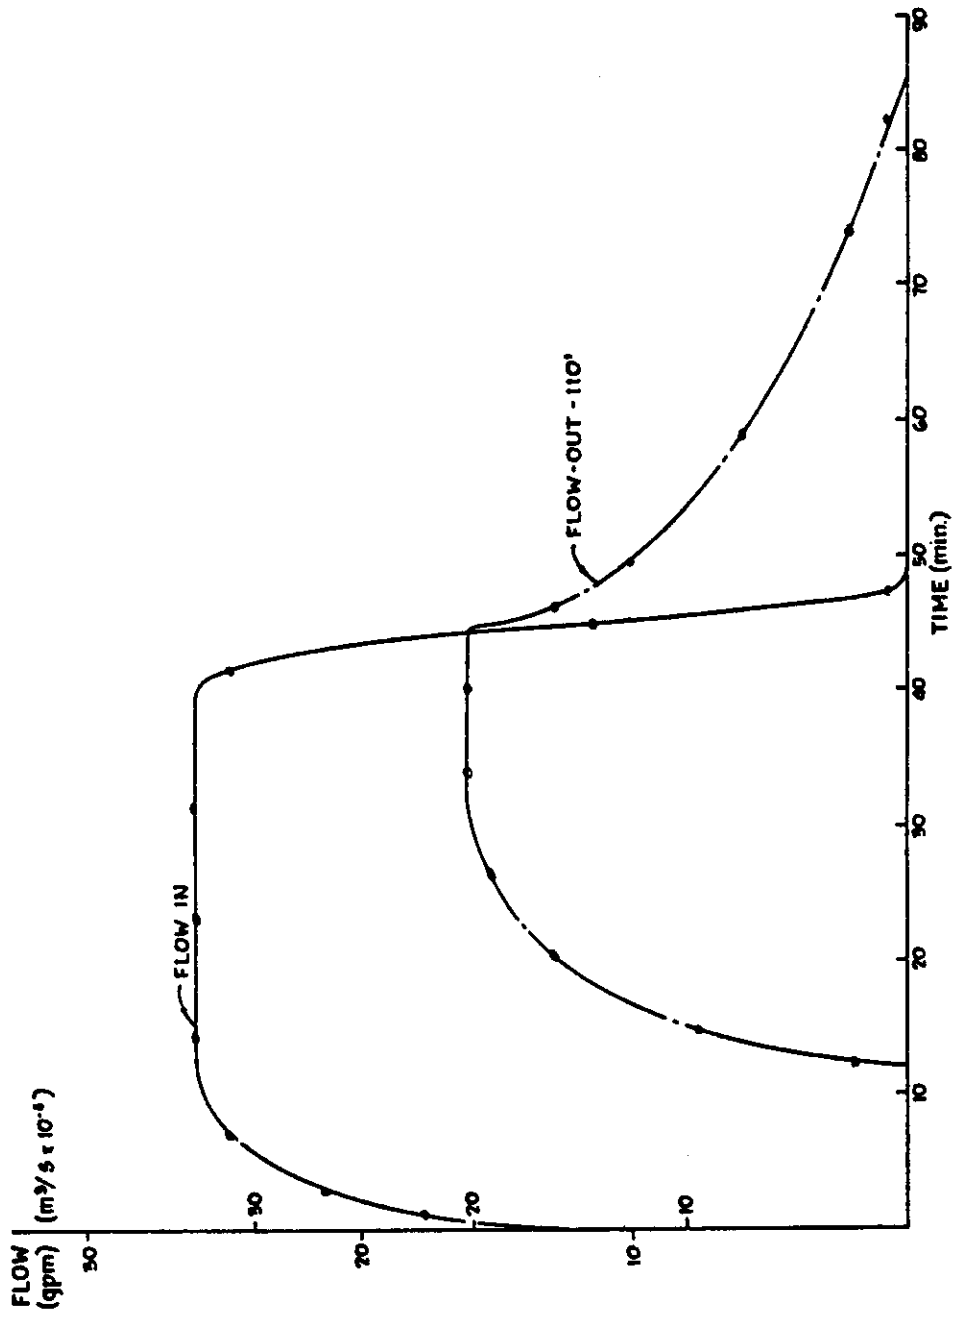


Figure 22. Swale at I-4 West - Experiment No. 2.

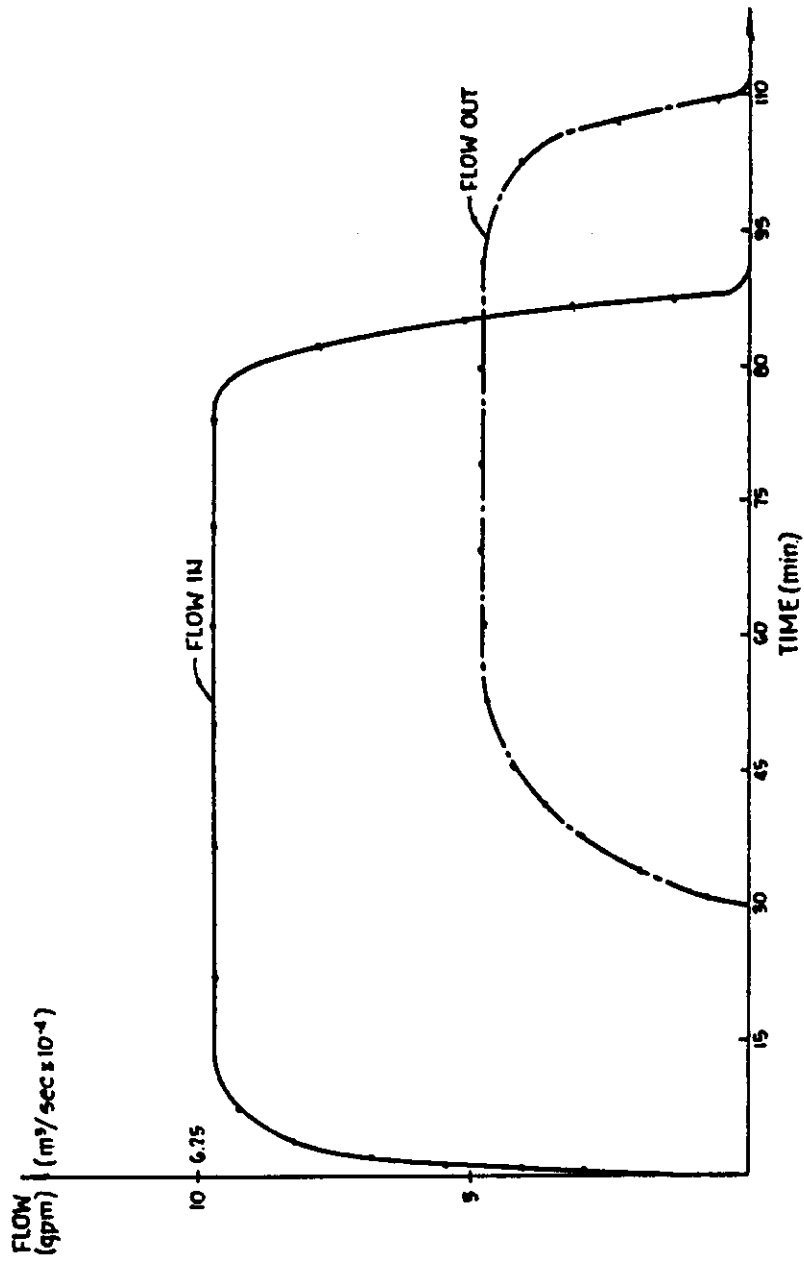


Figure 23. Swale at I-4 West - Experiment No. 3.

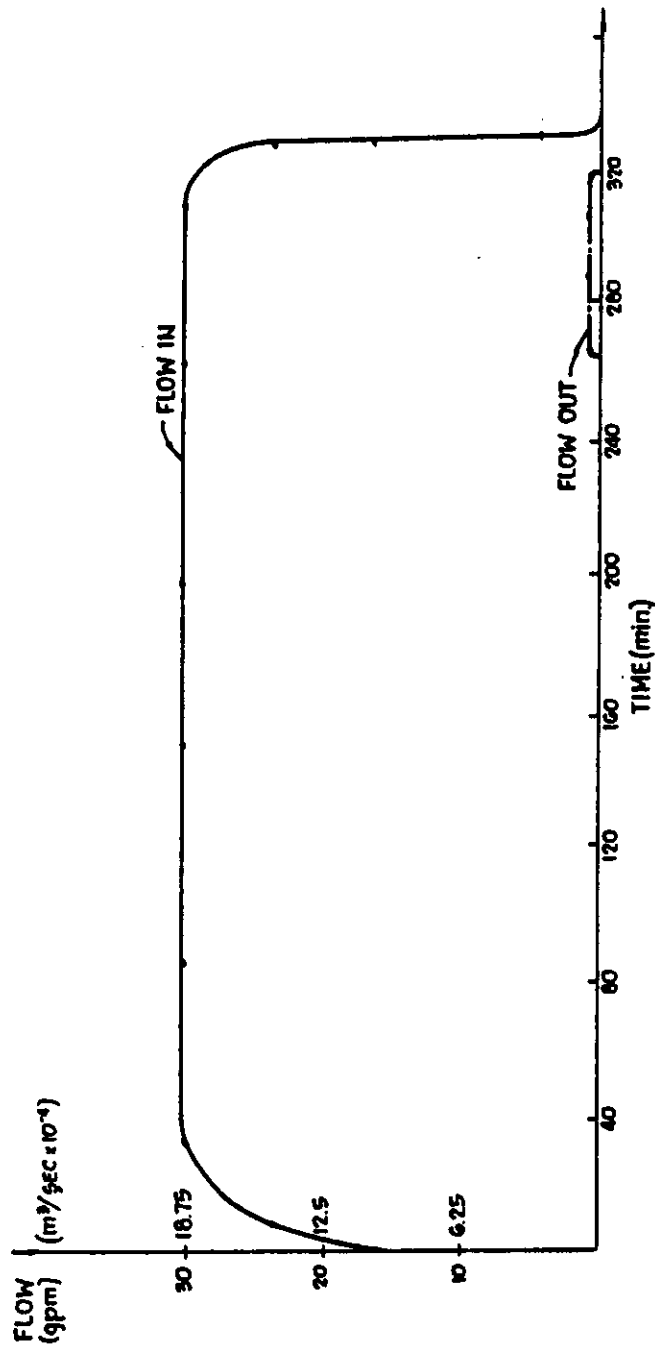


Figure 24. Swale at S.R. 426 - Experiment No. 1.

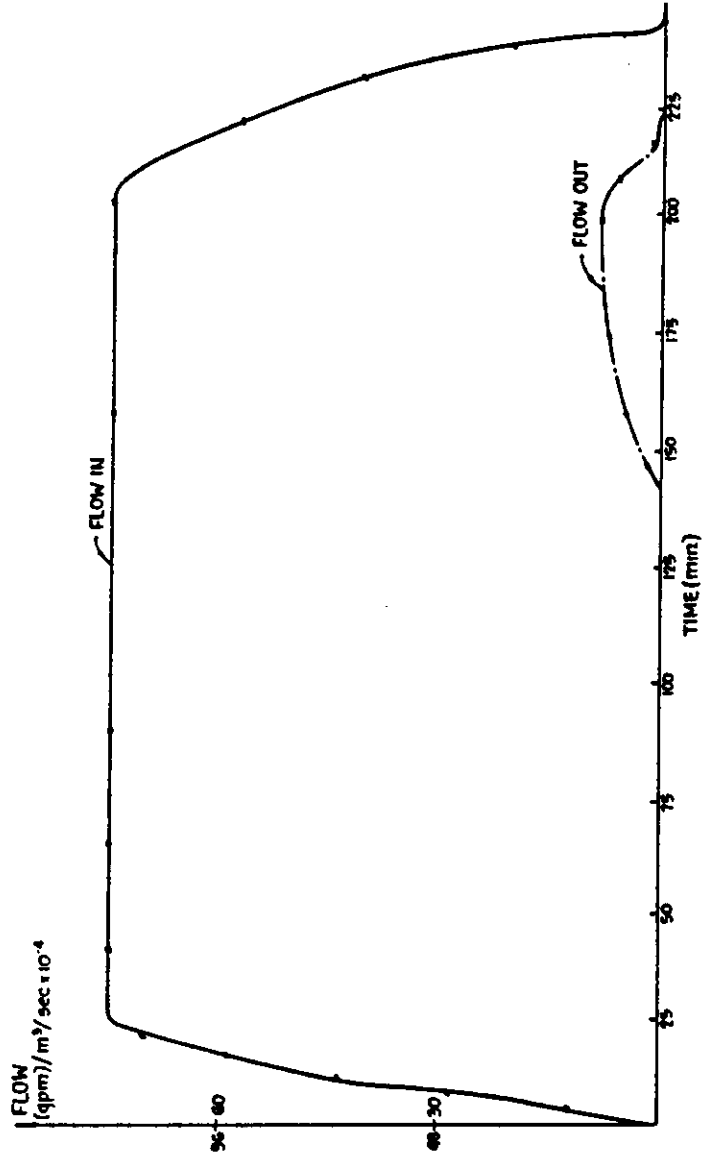


Figure 25. Swale at S.R. 426 - Experiment No. 2.

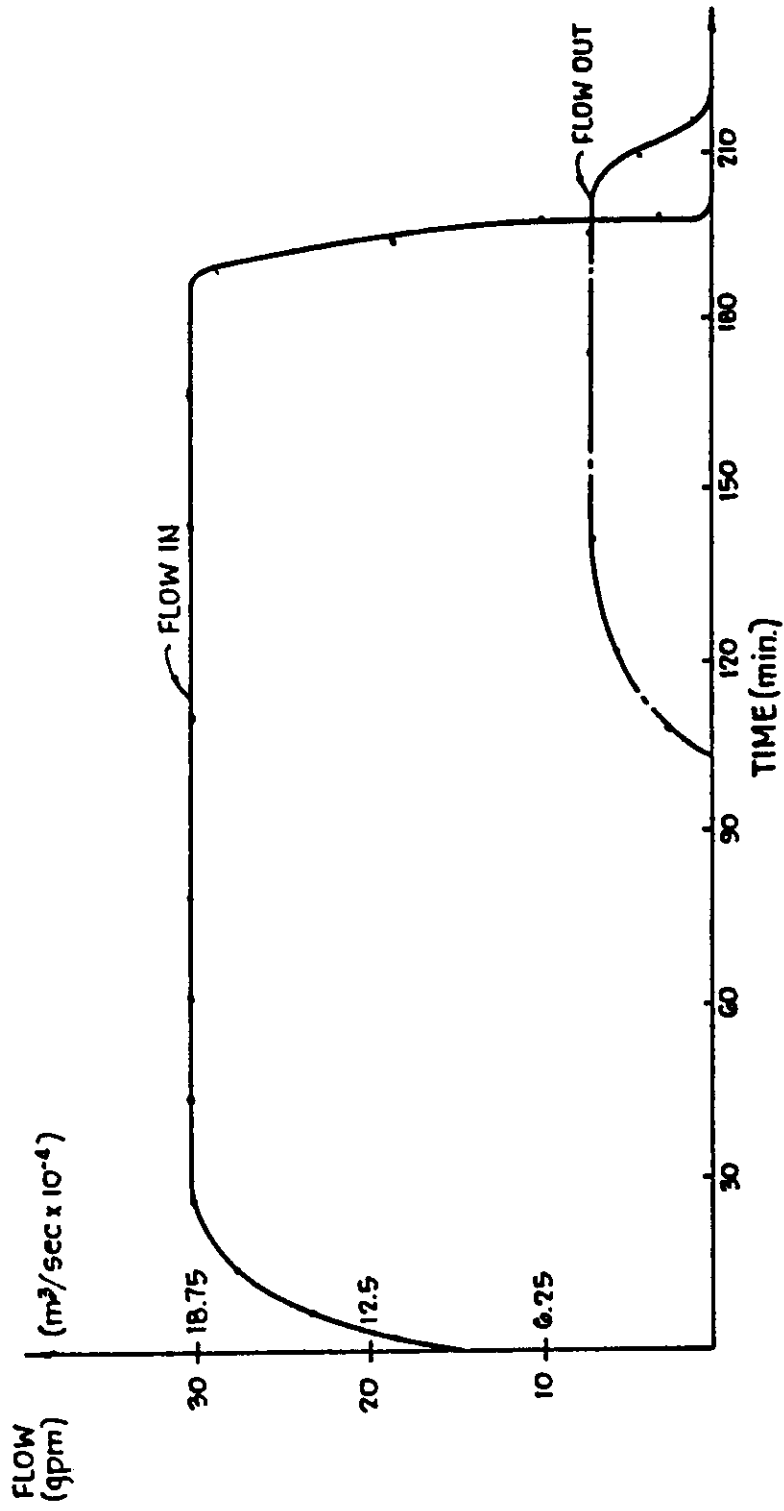


Figure 26. Swale at S.R. 426 - Experiment No. 3.

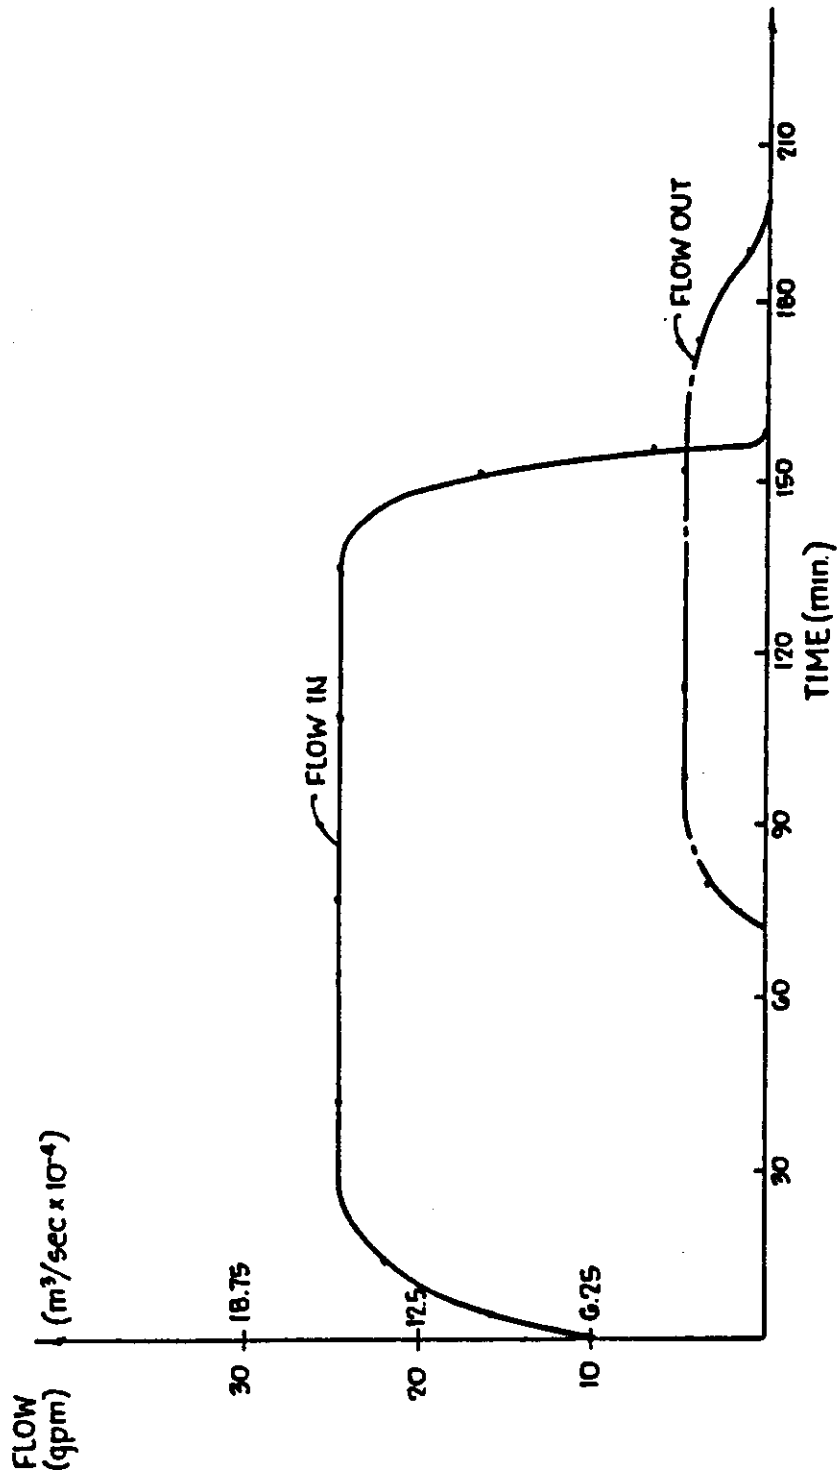


Figure 27. Swale at S.R. 426 - Experiment No. 4.

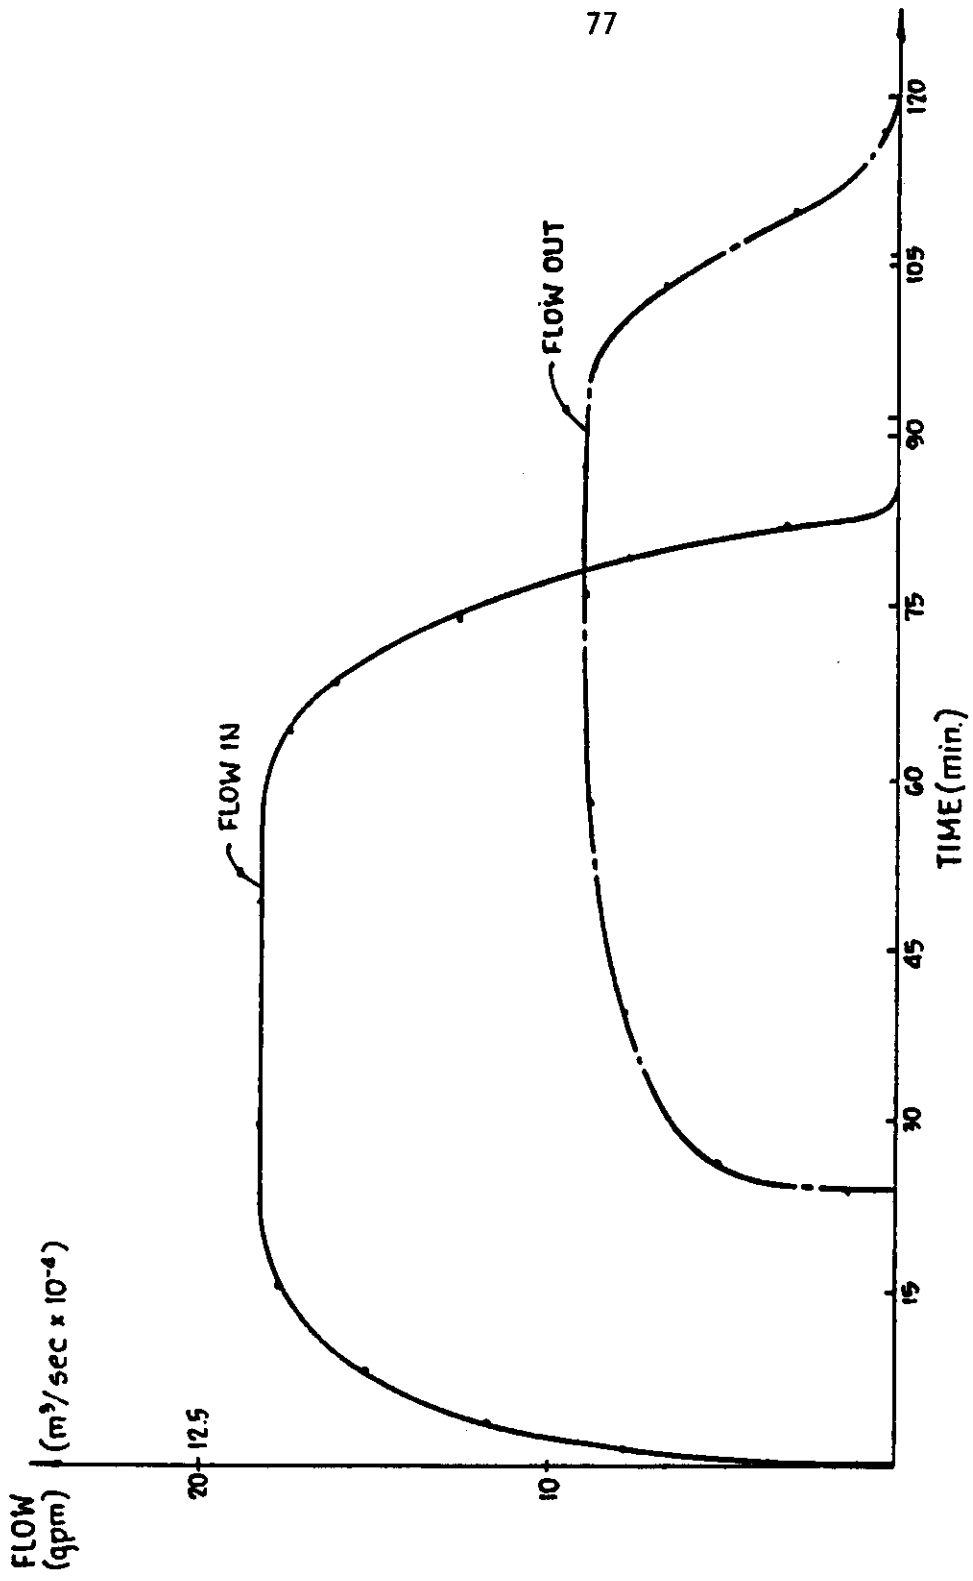


Figure 28. Swale at Reed Road - Experiment No. 1.

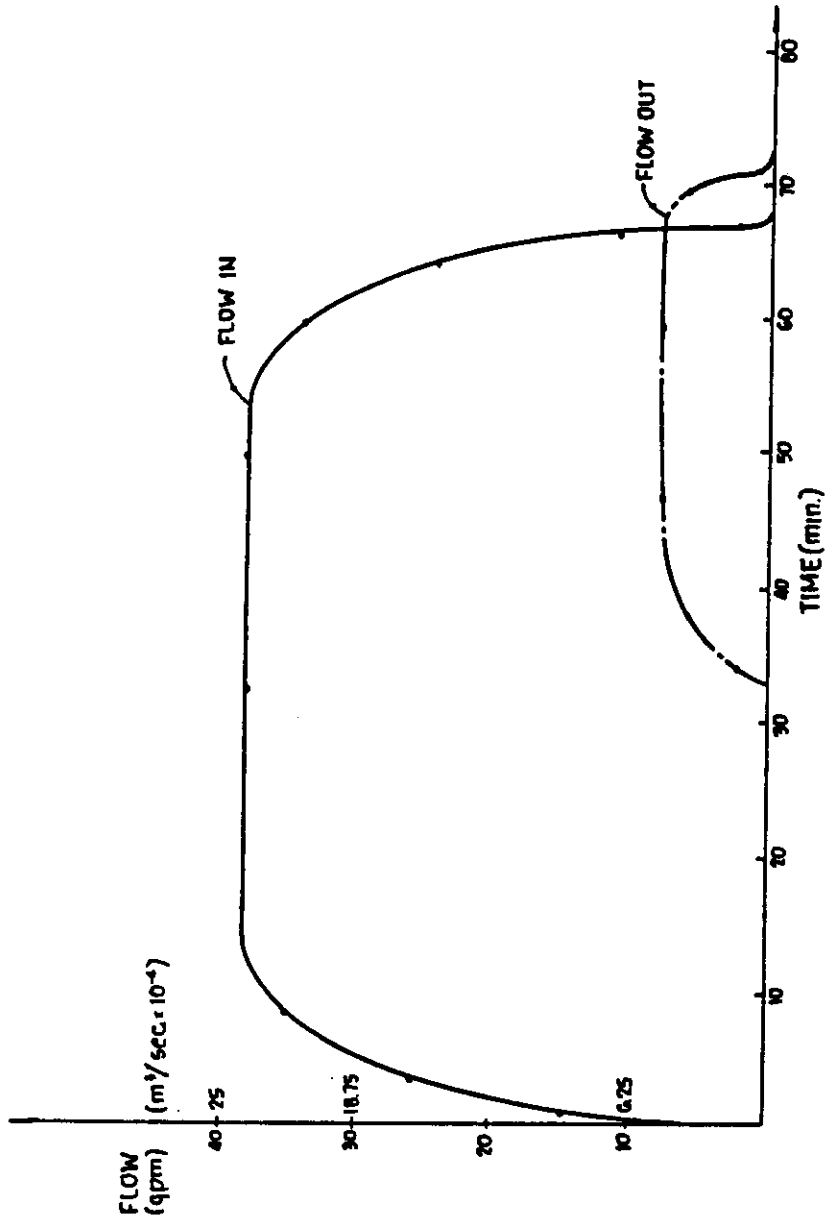


Figure 29. Swale at Reed Road - Experiment No. 2.

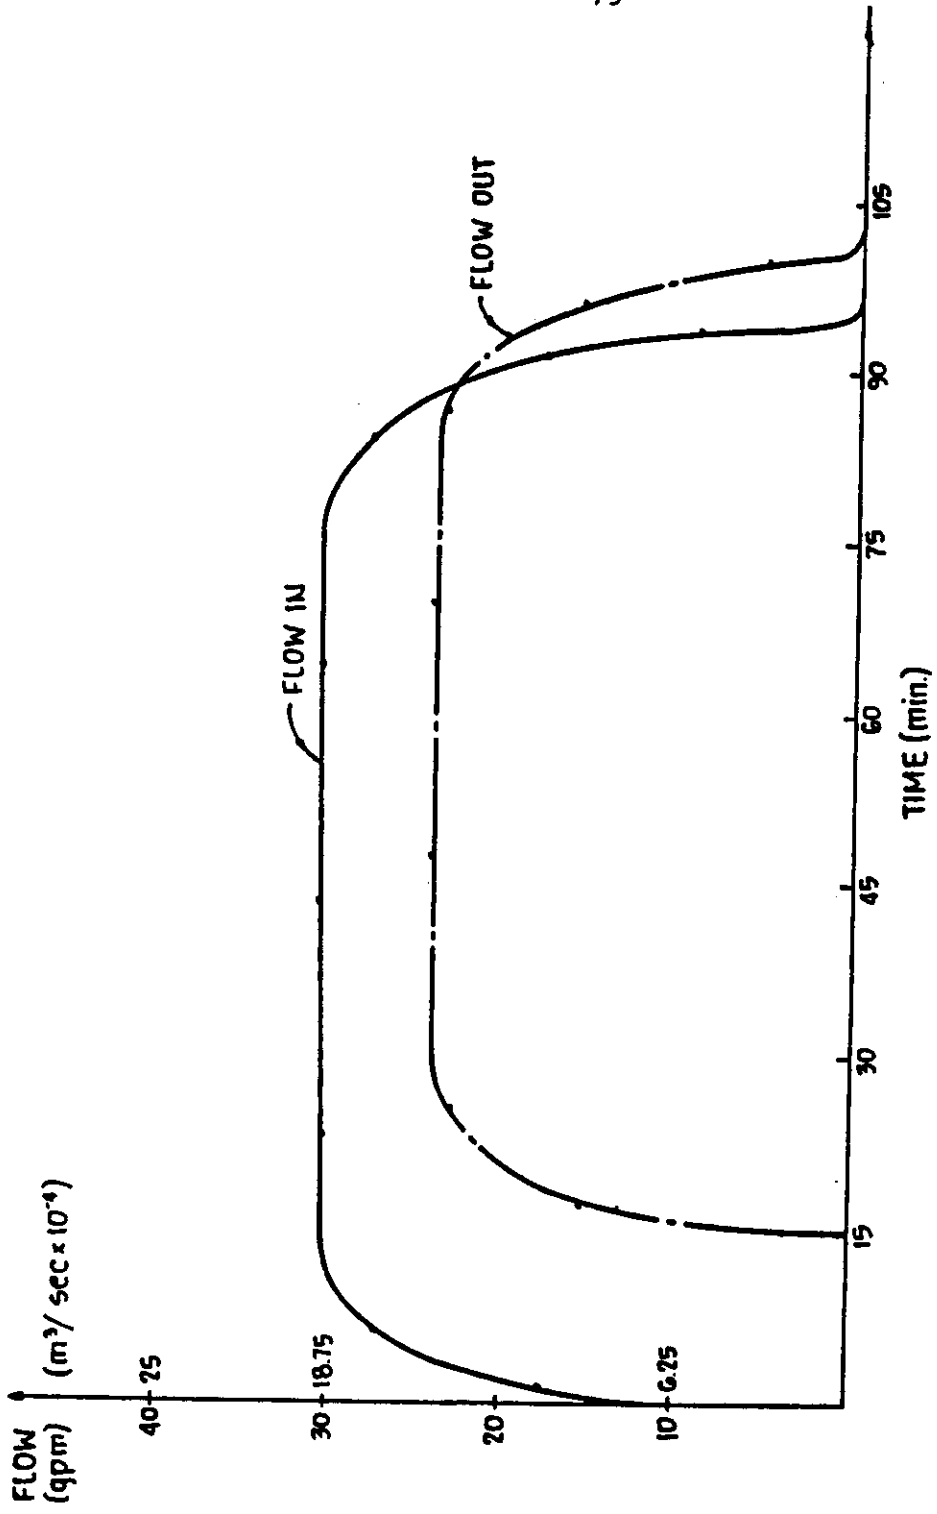


Figure 30. Swale at Reed Road - Experiment No. 3.

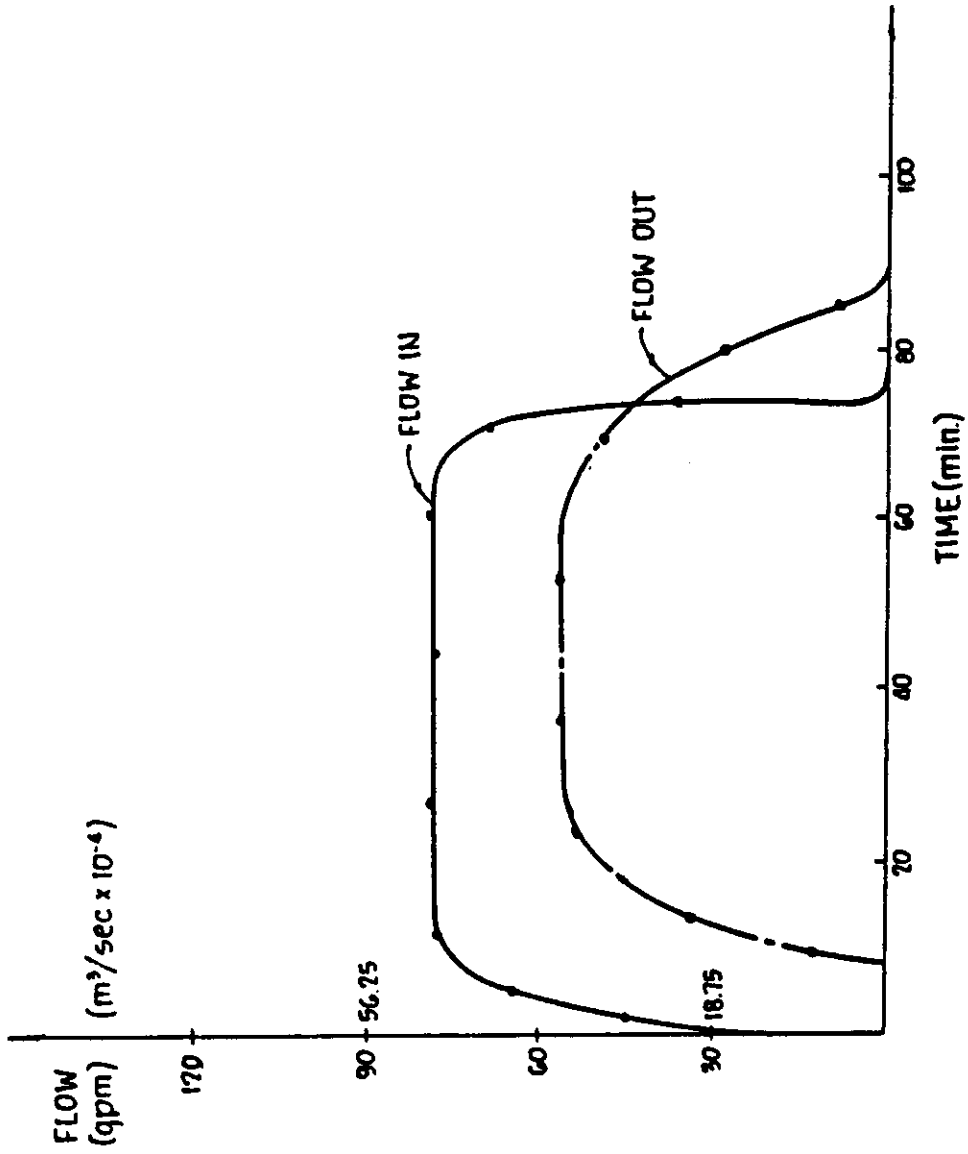


Figure 31. Swale at Reed Road - Experiment No. 4.

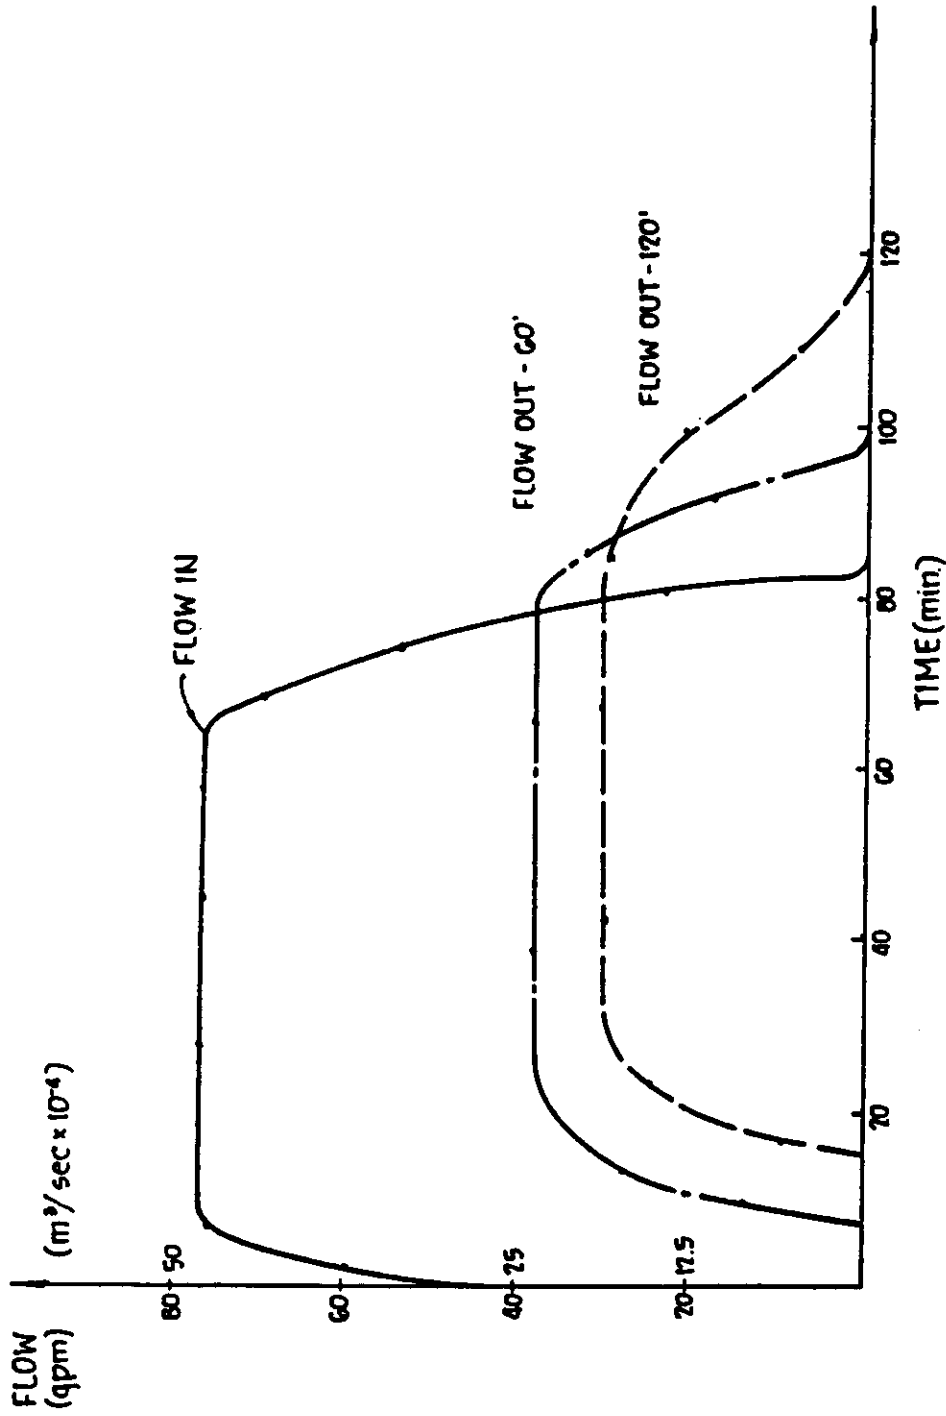


Figure 32. Swale at Reed Road - Experiments No. 5 and 6.

APPENDIX C

DERIVATION OF DESIGN EQUATION
FOR TRIANGULAR SECTIONS

Triangular Shaped Swale

Recall that the total infiltration volume (I) per unit time equals the rate of infiltration (i) times the contact area (A) between the water and the swale bottom. This infiltration volume is expressed as:

$$I = i A \quad (A-1)$$

Whereas the contact area can be defined as the product of the wetted perimeter (P) and the length of swale (L).

$$A = L \times P \quad (A-2)$$

For design, the volume of infiltration equals the volume of runoff water that enters the system, or:

$$I (\Delta t) = Q (\Delta t) \quad (A-3)$$

where:

$$Q = \text{flow rate of water in ft}^3/\text{sec}$$

Substituting equations (A-2) and (A-3) into equation (A-1), we get:

$$Q = L \times P \times i \quad (A-4)$$

and solving for L, we obtain:

$$L = \frac{3600 Q}{P \times i} \quad (A-5)$$

where 3600 is a conversion factor from cfs to ft³/hr.

For a triangular section, the depth of flow, D, can be defined as:

$$D = \frac{P}{2 \sqrt{1 + Z^2}} \quad (\text{A-6a})$$

where:

P = wetted perimeter of the swale

Z = horizontal component of side slope, Z = 1 which means
Z horizontal per one vertical

So that:

$$P = 2 \sqrt{1 + Z^2} D \quad (\text{A-6b})$$

and the cross-sectional area of the flow can be expressed as:

$$A = Z D^2 \quad (\text{A-7})$$

One of the most common equations to compute flow of water in open channels is the Manning's equation. When the US customary system of units is used, Manning's equation can be expressed as:

$$Q = \frac{1.486}{n} A R^{2/3} S^{1/2} \quad (\text{A-8})$$

where:

Q = average flow rate (cfs)

n = coefficient of roughness

R = hydraulic radius (ft)

S = longitudinal slope of swale

A = cross-sectional area of flow (ft²)

For trapezoidal sections, the hydraulic radius can be defined as:

$$R = \frac{D}{2} \frac{Z}{\sqrt{1 + Z^2}} \quad (\text{A-9})$$

Therefore, substituting equations (A-9) and (A-7) into equation (A-8), we obtain:

$$Q = \frac{1.486}{n} Z D^2 \left(\frac{DZ}{2 \sqrt{1 + Z^2}} \right)^{2/3} (S)^{1/2} \quad (\text{A-10})$$

or:

$$Q = \frac{1.486}{n} \frac{Z^{5/3} S^{1/2} D^{8/3}}{Z^{2/3} (1 + Z^2)^{1/3}} \quad (\text{A-11})$$

Multiplying the D terms:

$$Q = \frac{Z^{5/3} S^{1/2} D^{8/3}}{1.073 n (1 + Z^2)^{1/3}} \quad (\text{A-12})$$

Solving for D , it is found:

$$D = \left[\frac{1.073 Q n (1 + Z^2)^{1/3}}{Z^{5/3} S^{1/2}} \right]^{3/8} \quad (\text{A-13})$$

Substituting the value of D expressed in equation (A-13) into equation (A-6b), the wetted perimeter can be expressed as:

$$P = 2 (1 + Z^2)^{1/2} \left[\frac{1.073 Q n (1 + Z^2)^{1/3}}{Z^{5/3} S^{1/2}} \right]^{3/8} \quad (\text{A-14})$$

Finally, if one substitutes the value of P into equation (A-5):

$$L = \frac{3600 Q}{2 \left[\frac{1.073 Q n (1 + Z^2)^{1/3}}{Z^{5/3} S^{1/2}} \right]^{3/8} (1 + Z^2)^{1/2} \times \frac{i}{12}} \quad (\text{A-15})$$

Note that i is divided by 12 in order to be able to use the common units of in/hr. Then:

$$L = \frac{3600 Q}{\frac{2.054 Q^{3/8} n^{3/8} (1 + Z^2)^{1/8} (1 + Z^2)^{1/2}}{12 Z^{5/8} S^{3/16}}} \quad (\text{A-16})$$

and:

$$L = \frac{21,032 Q Z^{5/8} S^{3/16}}{Q^{3/8} (1 + Z^2)^{5/8} i n^{3/8}} \quad (\text{A-17})$$

Finally, we obtain:

$$L = \frac{21,032 Q^{5/8} Z^{5/8} S^{3/16}}{n^{3/8} (1 + Z^2)^{5/8} i} \quad (A-18)$$

where:

L = length of swale (ft)

Q = average flow rate to be percolated (cfs)

Z = horizontal distance per one foot of elevation change inside slope

S = longitudinal or flow slope

n = Manning's Roughness Coefficient

i = infiltration rate (in/hr)

Equation (A-18) can be used to predict the necessary length of swale to percolate certain amounts of runoff waters when U.S. Customary system of units is used.

When the International System of units is used, Manning's equation is written in the form:

$$Q = \frac{1}{n} A R^{2/3} S^{1/2} \quad (A-19)$$

and equation (A-14) would be expressed as:

$$P = 2 \left[\frac{1.5874 Q n (1 + Z^2)^{1/3}}{Z^{5/3} S^{1/2}} \right]^{3/8} (1 + Z^2)^{1/2} \quad (A-20)$$

Substituting this value into equation (A-5):

$$L = \frac{3600 Q}{2 \left[\frac{1.5874 Q n (1 + Z^2)^{1/3}}{Z^{5/3} S^{1/2}} \right]^{3/8} (1 + Z^2)^{1/2} \frac{i}{100}} \quad (\text{A-21})$$

Note that i is divided by 100 in order to use the infiltration rate in units of cm/hr. Then:

$$L = \frac{3600 Q}{\frac{2.378 Q^{3/8} (1 + Z^2)^{5/8} i n^{3/8}}{100 Z^{3/8} S^{3/16}}} \quad (\text{A-22})$$

which can be expressed as:

$$L = \frac{151,361 Q^{5/8} Z^{3/8} S^{3/16}}{n^{3/8} (1 + Z^2)^{5/8} i} \quad (\text{A-23})$$

where:

L = length of swale (m)

Q = average flow rate (m^3/s)

S = longitudinal slope

n = Manning's roughness coefficient

Z = side slope

i = infiltration rate (cm/hr)

Equation (A-23) can be used to calculate the necessary length of swale (L) to percolate the runoff (Q) when the International System of units is used.

APPENDIX D

DERIVATION OF EQUATION FOR TRAPEZOIDAL SECTIONS

Applying Manning's equation for US Customary System of units, it is obtained:

$$Q = \frac{1.486}{n} A R^{2/3} S^{1/2} \quad (\text{A-24})$$

For a trapezoidal section, the cross-sectional area of flow is defined as:

$$A = BD + ZD^2 \quad (\text{A-25})$$

where:

B = bottom width of the swale (ft)

D = depth of flow (ft)

Z = side slope

and, the wetted perimeter (P) can be defined as:

$$P = B + 2D \sqrt{1 + Z^2} \quad (\text{A-26})$$

Substituting $R = D/2$ and equation (A-25) into equation (A-24), it is found:

$$Q = \frac{1.486}{n} (BD + ZD^2) \left(\frac{(B + ZD) D}{B + 2D(1 + Z^2)^{1/2}} \right)^{2/3} \quad (\text{A-27})$$

which equals:

$$Q = \frac{1.486}{n} \frac{D^{5/3} (B + ZD)^{5/3}}{(B + 2D \sqrt{1 + Z^2})^{2/3}} S^{1/2} \quad (\text{A-28})$$

For design, the most efficient section should be used. For a trapezoidal section, the most efficient section is defined as:

$$\frac{B}{D} = 2 (\sqrt{1 + Z^2} - Z) \quad (\text{A-29})$$

Solving for D:

$$D = \frac{B}{2(\sqrt{1 + Z^2} - Z)} \quad (\text{A-30})$$

Substituting

$$Q = \frac{1.486}{n} \frac{D^{5/3} [B + 2(\sqrt{1 + Z^2} - Z)]^{5/3}}{[B + \frac{BZ}{2(\sqrt{1 + Z^2} - Z)}]^{2/3}} S^{1/2} \quad (\text{A-31})$$

Solving for D:

$$D = \left[\frac{\frac{B\sqrt{1 + Z^2}}{Q[B + (\sqrt{1 + Z^2} - Z)]^{2/3}} n}{1.486 [B + \frac{BZ}{2(\sqrt{1 + Z^2} - Z)}]^{5/3}} \right]^{3/5} \quad (\text{A-32})$$

$$D = \frac{Q^{3/5} (B + \frac{B\sqrt{1 + Z^2}}{\sqrt{1 + Z^2} - Z})^{2/5} n^{3/5}}{1.268 (B + 2(\sqrt{1 + Z^2} - Z))} \quad (\text{A-33})$$

Substituting in Equation (A-26):

$$P = B + \frac{2 Q^{3/5} \left(\frac{B \sqrt{1+Z^2}}{BZ} (B + \sqrt{1+Z^2} - Z) \right)^{2/5} n^{3/5} (1+Z^2)^{1/2}}{1.068 (B + 2(\sqrt{1+Z^2} - Z))} \quad (A-34)$$

$$D = \left[\frac{1.068 n Q (1+Z^2)^{1/3}}{S^{1/2} Z^{2/3} [2(1+Z^2)^{1/2} - Z]} \right]^{3/8} \quad (A-35)$$

Substituting the value of D in equation (A-35) into equation (A-26):

$$P = B + 2 \left[\frac{1.068 n Q (1+Z^2)^{1/3}}{S^{1/2} Z^{2/3} [2(1+Z^2)^{1/2} - Z]} \right]^{3/8} (1+Z^2)^{1/2} \quad (A-36)$$

Recall from the triangular section derivation that:

$$L = \frac{Q (3600)}{P \times i} \quad (A-37)$$

which, for units of in/hr for the infiltration rate, can be expressed as:

$$L = \frac{3600 Q}{P \times \frac{i}{12}} \quad (A-38)$$

or:

$$L = \frac{43,200 Q}{P \times i} \quad (A-39)$$

Substituting the value of wetted perimeter defined in equation (A-36) into equation (A-39), it is obtained:

$$L = \frac{43,200 Q}{\left\{ B + 2 \left[\frac{1.068 n Q (1 + Z^2)^{1/3}}{S^{1/2} Z^{2/3} 2[(1 + Z^2)^{1/2} - Z]} \right] \right\}^{3/8} (1 + Z^2)^{1/2}} i \quad (A-40)$$

where:

- L = length of swale (ft)
- B = bottom width of swale (ft)
- Q = average flow rate (cfs)
- n = Manning's roughness coefficient
- Z = side slope
- S = longitudinal slope
- i = infiltration rate of swale (in/hr)

If the International System of units is used, the length of swale necessary to percolate the runoff (Q) can be expressed as:

$$L = \frac{360,000 Q}{\{B + 2 \left[\frac{n Q (1 + Z^2)^{1/3}}{S^{1/2} Z^{2/3} 2[(1 + Z^2)^{1/2} - Z]} \right]^{3/8} (1 + Z^2)^{1/2}\} i} \quad (A-41)$$

where:

- L = length of swale (m)
- Q = average flow rate (cfs)
- i = infiltration rate (cm/hr)
- n = Manning's roughness coefficient
- Z = side slope
- S = longitudinal slope
- B = bottom width of swale (m)

REFERENCES

- Anderson, D.E. "Evaluation of Swale Design." Master's Thesis, University of Central Florida, Orlando, FL, 1982.
- Bouwer, Herman. Groundwater Hydrology. New York: McGraw-Hill Book Co., 1978.
- Dunn, I.S.; Anderson, L.R.; and Kiefer, F.W. Fundamentals of Geotechnical Analysis. New York: John Wiley and Sons, Inc., 1980.
- Florida State Department of Transportation. "Roadway and Traffic Design Standards." Index LOJ, January 1985.
- Fok, Y.S. "A Comparison of Phillip and Green-Amp Two-Term Equations." Transactions of the American Society of Agriculture 1 (1975): 223-230.
- Gray, D.M. "Application to the Infiltration Process." In Handbook on the Principles of Hydrology. New York: McGraw-Hill Book Co., 1970.
- Kent, E.J.; Shaw, L.Y.; and Wyant, D.C. "Drainage Control Through Vegetation and Soil Management." Transportation Research Record 596 (February 1977): 29.
- Lambe, T.W., and Whitman, R.V. Soil Mechanics, SI Version. New York: Rainbow and Bridge Book Co., 1979.
- Linsley, R.K., Jr.; Kohler, M.A.; and Paulhus, J.L. Hydrology for Engineers. New York: McGraw-Hill Book Co., 1975.
- Mein, R.G., and Farrell, D.A. "Wetting from Suction in Green-Amp." Proceedings of the Soil Scientific Society 9 (January 1973): 183-193.
- Mein, R.G., and Larson, C.L. "Modeling Infiltration During a Steady Rain." Water Resources Research 9 (February 1973): 384-394.
- Morel-Seytoux, H.J., and Khanji, J. "Derivation of an Infiltration Equation." Water Resources Research 10 (April 1973): 795-800.
- Musgrave, G.W., and Holtan, H.J. "Infiltration." In Handbook of Applied Hydrology. New York: McGraw-Hill Book Co., 1964.

- Phillip, J.R. "Theory of Infiltration." In Advances in Hydrosience. New York: McGraw-Hill Book Co., 1969.
- Rehmann-Koo, Susanna H. "Highway Runoff and Sediment Control." Master's Research Report, University of Central Florida, Orlando, FL, 1984.
- Soil Conservation Service. "Soil Conservation Survey Supplement: Seminole County, Florida." September 1975.
- Spangler, H.G., and Handy, R.L. Soil Engineering. New York: Intext Educational, 1973.
- Todd, David K. Groundwater Hydrology, 2nd ed. New York: John Wiley and Sons, 1980.
- Wanielista, M.P. Stormwater Management: Quantity and Quality. Ann Arbor, MI: Ann Arbor Science Publishers, 1973.
- Wanielista, M.P.; Yousef, Y.A.; and Harper, H.H. "Hydrology/Hydraulics of Swales." Paper presented at the Workshop on Open Channels and Culvert Hydraulics, Orlando, FL, October 22-23, 1983.
- Wanielista, M.P.; Yousef, Y.A.; and Harper, H.H. "Stormwater Management: An Update." University of Central Florida Publication Number 85-1, July 15, 1985.
- Wanielista, M.P.; Yousef, Y.A.; Van de Graaff, L.M.; and Kuo, S.S. "Best Management Practices - Enhanced Erosion and Sediment Control Using Swale Blocks." University of Central Florida, September 1985.



IKONOUX